



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : C09D 7/12, 131/06, C08K 5/37, G02B 1/04, C09D 131/00, 131/08, 139/04, C08F 26/06, 126/06, 226/06, 18/24, 118/00, 218/00, 218/04, 18/16, 118/16, 218/16, 18/18, 118/18, 218/18, 2/48, C08J 7/04</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/38924</p> <p>(43) International Publication Date: 5 August 1999 (05.08.99)</p>
<p>(21) International Application Number: PCT/AU98/01032</p> <p>(22) International Filing Date: 14 December 1998 (14.12.98)</p> <p>(30) Priority Data: PP 1559 29 January 1998 (29.01.98) AU</p> <p>(71) Applicant (<i>for all designated States except US</i>): SOLA INTERNATIONAL HOLDINGS LTD. [AU/AU]; Sherriffs Road, Lonsdale, S.A. 5160 (AU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (<i>for US only</i>): CHEN, Fang [AU/AU]; 20 Nalimba Street, Hallet Cove, S.A. 5158 (AU). TOH, Huan, Kiak [MY/AU]; 24 Medway Street, Fullarton, S.A. 5063 (AU). FISHER, Mark, Christopher [AU/AU]; 2 Headland Crescent, Woodcroft, S.A. 5162 (AU). CUTHBERTSON, Matthew, John [AU/AU]; 27 Phillips Street, Somerton Park, S.A. 5044 (AU).</p> <p>(74) Agents: NOONAN, Greg et al.; Freehills Patent Attorneys, Level 47, 101 Collins Street, Melbourne, VIC 3000 (AU).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>With amended claims.</i></p>	
<p>(54) Title: COATING COMPOSITION</p> <p>(57) Abstract</p> <p>clcross-linkable primer coating composition which is UV curable, exhibits a very short cure time, and includes an effective amount of a di- or polythiol compound.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

COATING COMPOSITION

The present invention relates to the manufacture of plastic optical articles such as video discs and ophthalmic lenses, and in particular coatings for such lenses.

5 The most widely used plastic ophthalmic lens material is polymerised diethylene glycol bis (allyl carbonate) (e.g. CR-39). This polymer has proved a satisfactory material for the manufacture of ophthalmic lenses because of a combination of features, including excellent transmission, resistance to discolouration, high strength and high impact resistance. The material has only a
10 reasonable abrasion resistance.

Such lenses can be made to be hard and abrasion resistant by the use of abrasion resistant coatings; however, their impact resistance can be greatly reduced by these hard, abrasion resistant coatings, especially in combination with a brittle vacuum deposited anti-reflection coating. Thin lenses, with a center
15 thickness of about 1.0 mm, are highly desired for cosmetic and weight considerations. However, the thickness of a lens is related to the impact properties of the lens. Specifically, thinner lenses have a lower impact resistance.

Coatings have been used in the prior art mainly to promote adhesion or provide a physical barrier as protection against chemicals, dirt, oxidation, etc. It is
20 known in the prior art, in ophthalmic applications, to utilise coats (via back-surface coating) to enhance the fracture resistance of lenses which are coated with thin layers of glasslike anti-reflection (AR) coatings. However, the coatings commercially available in the prior art are based on (blocked) polyurethane chemistry, and the curing involves a lengthy period where the material is tacky,
25 leading to contamination by airborne particles and yield loss.

Further whilst it is known in the prior art that dyes, including photochromic dyes, may be directly introduced into low index refractive lens materials and certain medium to high refractive index material directly by way of imbibition, this is not possible with polycarbonates such as CR-39 and other high index materials.

Accordingly, for such materials it is necessary to apply a coating material to a surface of the lens which material is capable of receiving a dye material. However, such a technique presents optical problems, e.g. in matching refractive indices and physical problems in that the coating, when applied, is in a tacky, gel-
5 like state and may take 1 hour or more to cure to a dry state.

During this tacky step, the coating is susceptible to dust, other airborne contaminants and yield loss.

Lenses formed from polymers including divinyl benzene and discussed in the prior art are generally brittle and have a high yellowness index.

10 Japanese Patent Application 63-309509 to Showa Denko KK discloses the formation of a prepolymer of divinyl benzene and a polythiol compound which may be used in the formation of optical materials with high refractive indexes.

Japanese Patent Application 63-19498 to Mitsubishi Gas discloses a high refractive index composition of divinyl benzene and a thiol compound. However
15 optical lenses produced thereby exhibit unacceptable strain characteristics and cure times.

However, there remains a need in the prior art for optical articles having high refractive indexes, having improved impact resistance, and preferably improved abrasion resistance. There further remains a need for optical articles of
20 medium to high refractive index which permit introduction of dyes.

Accordingly, it is an object of the present invention to overcome, or at least alleviate, one or more of the difficulties related to the prior art.

Accordingly, in a first aspect the present invention provides a cross-linkable primer coating composition which is UV curable, exhibits a very short cure time,
25 and includes an effective amount of
a di-or polythiol compound.

Preferably, the cross-linkable primer coating composition further includes an effective amount of

an allyl or vinyl monomer; and optionally
a polymerisable comonomer.

5 The primer coating composition may be UV-curable. The primer coating composition may be UV-curable in air. This provides a highly pure product, substantially free of by-products, and improved process control. Further, the primer coating composition is receptive to the inclusion of dyes, including photochromic dyes. The dyes may be included directly in the composition or may
10 be introduced into a coating formed from the composition, e.g. by imbibition.

It will be understood that this is a significant improvement over the prior art. With acrylic resins, the inclusion of a photochromic material would render a UV cure extremely difficult, if not impossible, as the dye is competing with the monomer acrylate. This is particularly so in an air environment where the air
15 would normally further exhibit UV cure.

Whilst we do not wish to be restricted by theory, it is postulated that the high purity relates to the fact that there is no or substantially no homopolymerisation of the allylic or vinyl monomer under UV reaction conditions. This may be contrasted with prior art coatings in which acrylic monomers are a
20 major component.

It will be further understood that as the coating composition according to the present invention may be subjected to a UV cure having a very short cure time, a hard, non-tacky coat is formed virtually immediately, so the possibility of contamination or yield loss may be substantially reduced or eliminated.

25 In a preferred aspect of the present invention there is provided a coated optical article including
an optical article; and
a primer coating on at least a surface of the optical article, the primer coating being formed from a primer coating composition which is

UV curable,
exhibits a very short cure time; and
includes an effective amount of a di- or polythio compound.

Preferably, the primer coating composition further includes an effective
5 amount of
an allyl or vinyl monomer; and optionally
a polymerisable comonomer.

An optical article coated with the primer coating composition of the
present invention may be optically clear and substantially aberration free. The
10 primer coating may provide improved impact resistance to the optical article and
may provide improved adhesion for other coatings including abrasion resistant
coatings.

The thickness of the primer coating may be varied to adjust adhesion
and/or impact strength of the final product. Thickness may vary from
15 approximately 0.01 μm to 100 μm , preferably approximately 0.1 μm to 50 μm .

As discussed below, the primer coating may, in one preferred
embodiment, incorporate a dye material, e.g. a photochromic material. Where the
primer coating includes a photochromic material, the thickness of the primer
coating is preferably at the upper end of the above ranges. For medium to high
20 refractive index optical articles such as CR39 lens, the primer coating thus
functions to permit introduction of a dye either directly in the primer coating
composition or indirectly, e.g. by imbibition into the primer coating so formed.

For example, preferably when the primer coating includes a dye
component the coating has a thickness of approximately 10 to 75 micron

25 In contrast, preferably when the primer coating does not include a dye
component, the primer coating has a thickness of approximately 0.1 to 5 micron.
In this form, the primer coating functions principally to provide an improvement in
impact resistance and optionally improved adhesion.

The coating formed from the primer coating composition may exhibit a high refractive index and a low glass transition temperature (T_g), preferably below approximately 60°C. The refractive index may be tailored to that of the optical substrate. The refractive index may be varied for example between approximately 1.50 to approximately 1.65.

By the term "high refractive index", as used herein, we mean a polymer having a refractive index of at least approximately 1.55, preferably 1.57. By the term "very high refractive index" as used herein, we mean a polymer having a refractive index of approximately 1.59 or above, preferably 1.60 or above.

As stated above, the coated optical article may further include a dye component, preferably a photochromic dye component. The dye component may be introduced into the primer coating or included in the primer coating composition, as desired.

In a preferred aspect, the primer coating composition according to the present invention is surprisingly UV curable, preferably in air, in the presence of a photochromic dye component. Accordingly in this aspect, the present invention provides a cross-linkable primer coating composition which is UV curable in the presence of a photochromic dye component, exhibits a very short cure time and includes an effective amount of

- a di- or polythiol monomer;
- an allyl or vinyl monomer;
- a photochromic dye component; and optionally
- a polymerisable comonomer.

Preferably the photochromic dye is selected from one or more of the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans and fulgides.


More preferably the photochromic dye is selected from one or more of the group consisting of

- 1,3-dihydrospiro[2H-anthra[2,3-d]imidazole-2,1'-cyclohexane]-5,10-dione


- 1,3-dihydrospiro[2H-anthra[2,3-d]imidazole-2,1'-cyclohexane]-6,11-dione
- 1,3-dihydro-4-(phenylthio)spiro[2H-anthra'1,2-d]imidazole-2,1'-cyclohexane]-6,11-dione
- 1,3-dihydrospiro[2-H-anthra[1,2-d]imidazole-2,1'-cycloheptane]-6,11-dione
- 5 • 1,3,3-trimethylspiroindole-2,3'-[3H]naphtho[2,1-b]-1,4-oxazine]
- 1,3,3-trimethyl-9'-hydroxyspiroindolinenaphthoxadine
- 1,3,3-trimethyl-9'-(2-hydroxyethyloxy)-spiroindolinenaphthoxadine
- 1,3,3-trimethyl-6'-piperidino-9'-hydroxy-spiroindolinenaphthoxadine
- 2-methyl-3,3'-spirobi[3H-naphtho[2,1-b]pyran] (2-Me)
- 10 • 2-phenyl-3-methyl-7-methoxy-8'-nitrospiro[4H-1-benzopyran-4,3'-[3H]-naphtho]2,1-b]pyran
- Spiro[2H-1-benzopyran-2,9'-xanthene]
- 8-methoxy-1',3'-dimethylspiro(2H-1-benzopyran-2,2'-(1'H)-quinoline
- 2,2'-Spirobi[2H-1-benzopyran]
- 15 • 5'-amino-1',3',3'-trimethylspiro[2H-1-benzopyran-2,2'-indoline
- Ethyl- β -methyl- β -(3',3'-dimethyl-6-nitrospiro(2H-1-benzopyran-2,2'-indolin-1'-yl))-propenoate
- (1,3-propanediyl)bis[3',3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'-indoline]
- 20 • 3,3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'-benzoxazoline]
- 6'-methylthio-3,3'-dimethyl-8-methoxy-6-nitrospiro[2H-1-benzopyran-2,2'-benzothiozoline]
- (1,2-ethanediyl)bis[8-methoxy-3-methyl-6-nitrospiro[2H-1-benzopyran-2,2'-benzothiozoline]
- 25 • N-N'-bis(3,3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'(3'H)-benzothioazol-6'-yl)]decanediamide
- - α -(2,5-dimethyl-3-furyl)ethylidene(Z)-ethylidenesuccinic anhydride; α -(2,5-dimethyl-3-furyl)- α' , δ -dimethylfulgide
- 2,5-diphenyl-4-(2'-chlorophenyl)imidazole
- 30 • [(2',4'-dinitrophenyl)methyl]-1H-benzimidazole
- N-N-diethyl-2-phenyl-2H-phenanthro[9,10-d]imidazol-2-amine
- 2-Nitro-3-aminofluoren 2-amino-4-(2'-furanyl)-6H-1,3-thiazine-6-thione

The di- or polythiol compound in the primer coating composition of the present invention may be of any suitable type. The thiols may have a functionality of 1 to 8, preferably 1 to 4. A di-, tri- or tetra polythiol compound may be used. The thiol may be selected from one or more of the following:


- 5 a) 4-mercaptomethyl-3,6-dithia-1,8-octanedithiol [MDO]



- b) Trimethylolpropane Tris (3-mercaptopropionate) [TTMP]




- c) Pentaerythritol Tetrakis (3-mercaptopropionate) [PTMA]




10

- d) Trimethylolpropane Tris (3-mercaptopropionate) [TTMA]




- e) 4-t-butyl-1,2-benzenedithiol




- 15 f) Bis-(2-mercaptoethyl)sulfide




- g) 4,4'-thiodibenzenethiol




- h) benzenedithiol




- 5 i) Glycol Dimercaptoacetate



- j) Glycol Dimercaptopropionate Ethylene bis(3-Mercaptopropionate)




- k) Polyethylene Glycol Dimercaptoacetates




10


- l) Polyethylene Glycol Di(3-Mercaptopropionates)

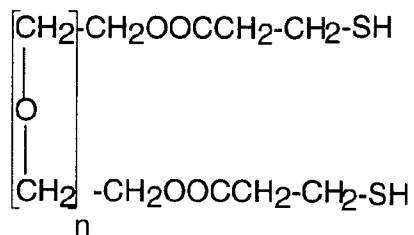


- m) Pentaerythritol Tetrakis (3-mercapto-propionate) [PTMP]




- n) Mercapto-methyl tetrahydrothiophene [MMTHT]




- 5 o) Tris-(3-mercaptopropyl)isocyanurate [TMPIC]

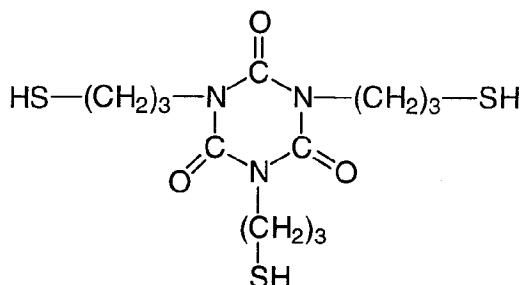

- p) 2-mercaptoethyl sulphide




- q) 1,2,3-trimercaptopropane




10


- r) 2,2-bis(mercaptomethyl)-1,3-propanedithiol




- s) Dipentaerythrithiol




- t) 1,2,4-trimercaptomethyl benzene




- u) 2,5-dimercaptomethyl-1,4-dithiane



- 5 v) BPHE-SH

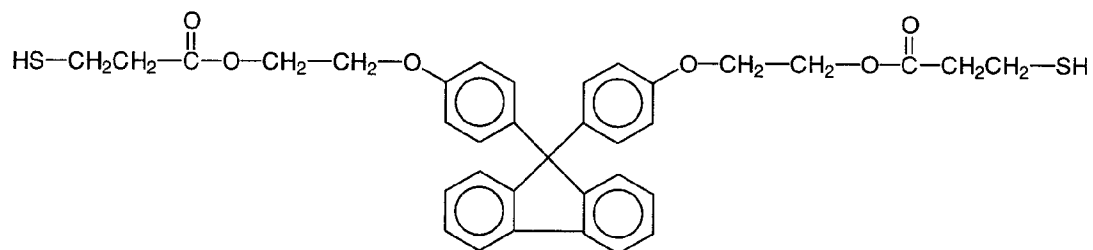


- w) 4,8-bis(mercaptomethyl)-3,6,9-trithia-1,11-undecanedithiol




- x) 2-mercaptomethyl-2-methyl-1,3-propanedithiol



- y) DMDO: 1,8-dimercapto-3,6-dioxaoctane



z) TGBMA




- 4-mercaptomethyl-3,6-dithia-1,8-octanedithiol [MDO], Trimethylolpropane Tris (3-mercaptopropionate) [TTMP] and pentaerythritol tetrakis (3-mercapto-propionate) [PTMP] and pentaerythritol tetrakis(3-merceptoacetate) are particularly preferred.

- The di- or polythiol compound may preferably be present in amounts of from approximately 15 to 80% by weight, more preferably approximately 20 to 70% by weight and particularly approximately 30 to 60% by weight based on the total weight of the primer coating composition (excluding solvent if any).
- 10 Variations in the amount of di- or poly-thiol compound may permit the user to select a refractive index value within a specified range. For example the refractive index may be varied between 1.50 and 1.65 or above.


The allyl or vinyl monomer may be a di- or polyallyl or di- or polyvinyl monomer, or mixtures thereof. A diallyl compound or triallyl is preferred.

- 15 The allyl monomer may accordingly preferably be selected from one or more of the following:


a) Diallyl isophthalate




b) Tetraallyl pyromellitate




c) Triallyl trimesate

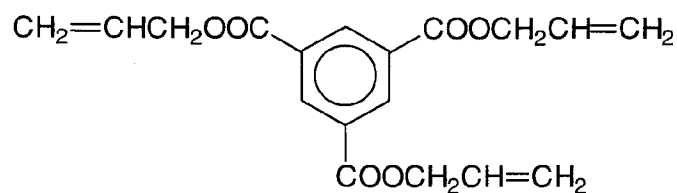


d) Triallyl isocyanurate (TAIC)

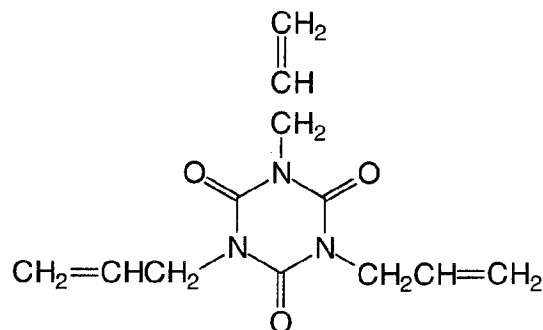


5 e) Triallyl cyanurate (TAC)

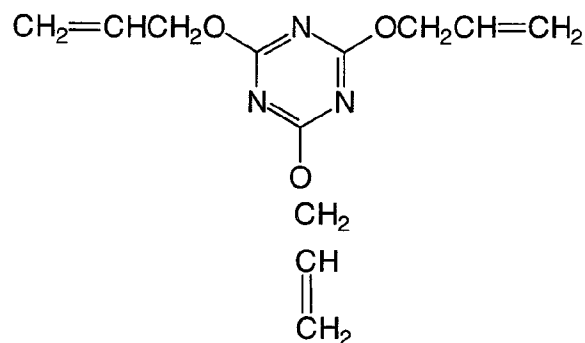

f) Tetraallyloxyethane



g) Triallylamine




A diethylene glycol bis(allyl) carbonate, such as that sold under the trade

designation CR-39 has been found to be suitable. A triallyl compound, such as triallyl cyanurate or triallyl isocyanurate, has also been found suitable. The vinyl or polyvinyl monomer, when present, may be a di- or tri- vinyl monomer.


An aromatic divinyl may be included. The aromatic divinyl monomer may include divinyl benzene, divinyl naphthene or derivatives thereof. 1,5-divinyl naphthene may be used. Divinyl benzene is particularly preferred.

Vinyl ethers are also preferred components in the coating composition. Divinyl ether and trivinyl ether monomers and oligomers are particularly preferred. The vinyl ether monomers and oligomers may accordingly preferably be selected from one or more of the following:


- 1) 1-Butanol, 4-(ethenyloxy)-benzoate

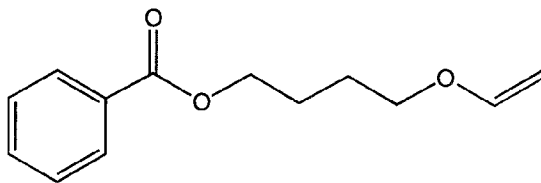


- 2) Cyclohexanemethanol, 4-[(ethenyloxy)methyl]-, benzoate

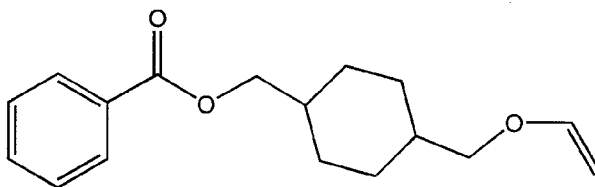


- 3) 1,3-Benzenedicarboxylic acid, bis [4-(ethenyloxy)butyl] ester

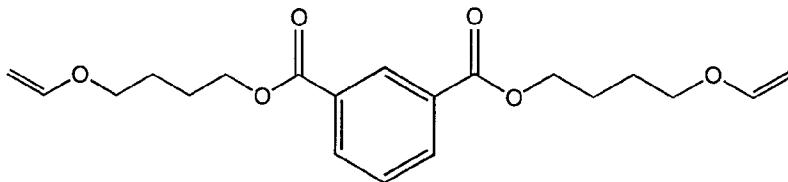


- 4) Pentanedioic acid, bis[[4-[(ethenyloxy)methyl]cyclohexyl]methyl]ester

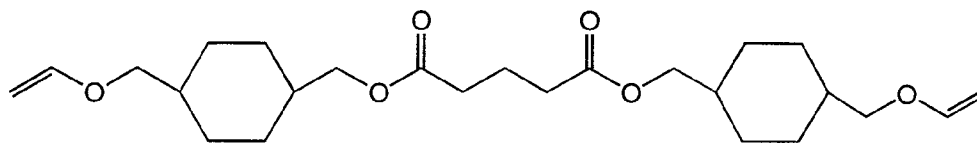


- 5) Butanedioic acid, bis [4-ethenyloxy)butyl] ester

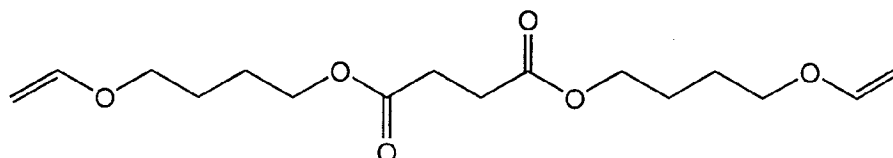


- 5 6) Hexanedioic acid, bis[4-(ethenyloxy)butyl] ester

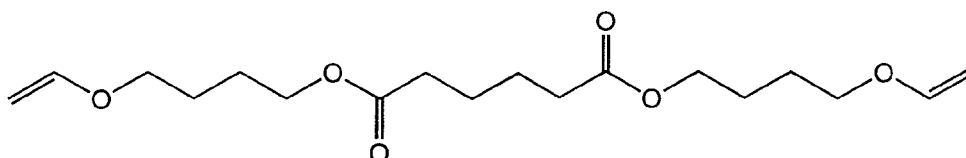


- 7) Carbamic acid, (methylenedi-4,1-phenylene)bis-, bis[4-(ethenyloxy)butyl] ester

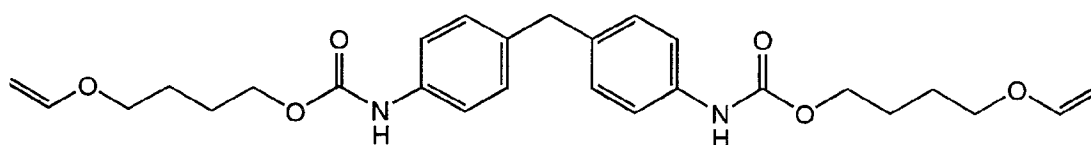

- 10 8) Carbamic acid, (4-methyl-1,3-phenylene)bis-, bis[4-(ethenyloxy)butyl] ester

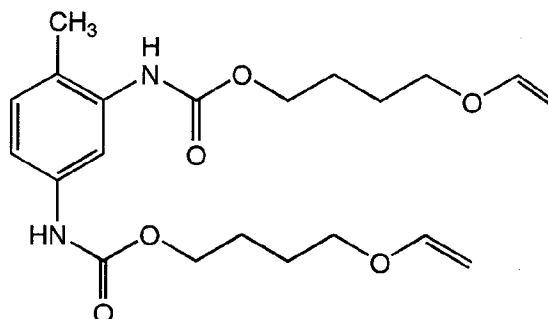

- 9) 1,2,4-Benzenetricarboxylic acid, tris[4-ethenyloxy)butyl] ester

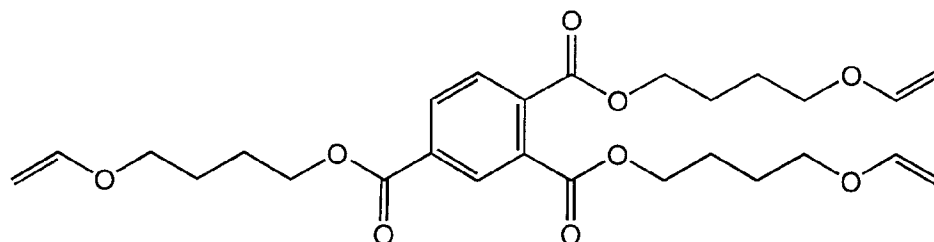

- 10) Vectomer 1214 Polyester
- 11) Vectomer 1221 Aromatic polyester divinyl ether
- 5 12) Vectomer 1222 Aromatic polyester divinyl ether
- 13) Vectomer 1312 Polyfunctional ester
- 14) Polyfunctional polyester
- 15) Vectomer 2010 Aromatic urethane divinyl ether
- 16) Vectomer 2020 Aliphatic urethane divinyl ether
- 10 17) Vectomer 2031 Aromatic urethane divinyl ether
- 18) Vectomer 2032 Aromatic urethane divinyl ether

A polyurethane divinyl ether is particularly preferred. A divinyl ether oligomer, such as that sold under the trade designation Vectomer 2020 from Allied Signal has been found suitable.

- 15 The allyl or vinyl monomer may preferably be present in amounts sufficient to provide a suitable index to the optical coating formed from the primer coating composition, but not so much as to cause brittleness or low solvent resistance ability. Amounts of from approximately 10 to 80% by weight, preferably approximately 15 to 75% by weight, more preferably about 20 to 60% by weight
- 20 based on the total weight of the primer coating composition may be used (excluding solvents if any).

The primer coating composition in a preferred aspect may optionally further include a polymerisable comonomer.

- The polymerisable comonomer may be selected to improve the properties
- 25 and/or processability of the primer coating composition. The polymerisable


comonomer may be selected to improve tint rate, hardness, abrasion resistance, adhesion, solvent resistance and the like of the resulting polymer coating. The polymerisable comonomer may be an unsaturated epoxy, mercapto or isocyanate comonomer. The polymerisable comonomer may be selected from any suitable
 5 type, e.g. methacrylates, acrylates, vinyls, vinyl ethers, allyls, epoxides, and the like.

The polymerisable comonomer may preferably be selected from one or more of epoxidised monomer or oligomer vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or methacrylates, polymerisable bisphenol
 10 monomers, urethane monomers having 2 to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates, and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe number acrylic or methacrylic monomers.

Where an epoxidised monomer or oligomer is included, the epoxidised monomer may function to improve curing characteristics and/or adhesion to both
 15 lens and hard coats. The epoxidised monomer or oligomer may fall into one or more of the following classes: internal, terminal, mono-functional, di-functional, tri-functional, tetra-functional, aliphatic, aromatic, cyclic, structurally simple, structurally complex, esters, ethers, amines. An epoxidised soybean material may be used. The epoxidised monomer or oligomer may be selected from one or
 20 more of the following


- 1) Epoxidised soybean oil - Triglycerides of a mixture of epoxidised a) oleic acid, b) linoleic acid, c) linolenic acid

a)




25


b)




c)




2) Propylene Oxide




5 3) Hexanediol diglycidyl ether (HDGE)




4) 1,2 epoxy butane




5) Bisphenol fluorene diglycidyl ether (BPGE)

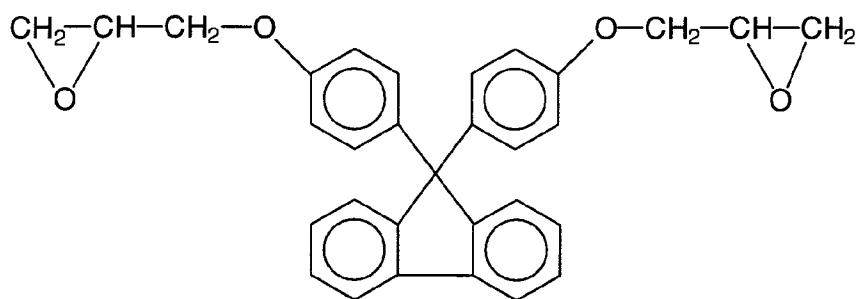


6) Epolight 100MF

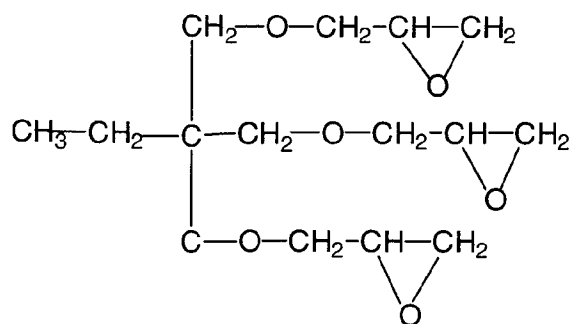


7) AK-601

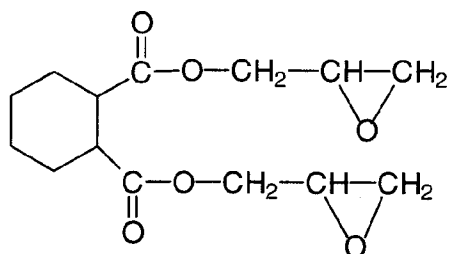


5 8) MY 721

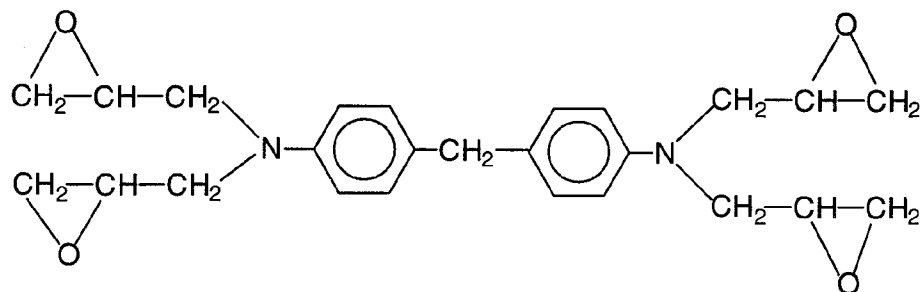


9) Alkyl (C12~13) (glycidyl ether)




10) Ethylene glycol (diglycidyl ether)




- 11) PEG#200 (diglycidyl ether)




- 12) PEG#400 (diglycidyl ether)




- 5 13) Propylene glycol (diglycidyl ether)



- 14) Tripropylene glycol (diglycidyl ether)




- 15) PPG#400 (diglycidyl ether)




10


- 16) Neopentyl glycol (diglycidyl ether)

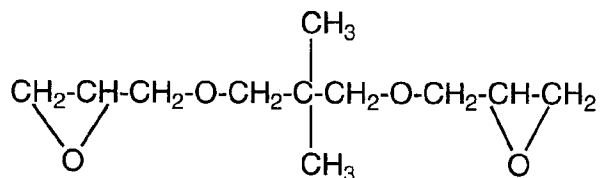


- 17) 1-6-hexanediol (diglycidyl ether)




- 18) Glycerin (diglycidyl ether)




- 5 19) Trimethylolpropane (triglycidyl ether)




- 20) Hydrogenize bisphenol A (diglycidyl ether)

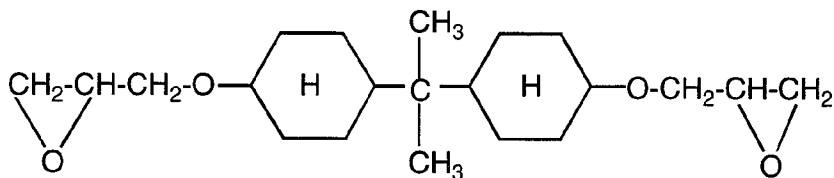


- 21) Diglycidyl ether of propylene oxide modified (bisphenol A)

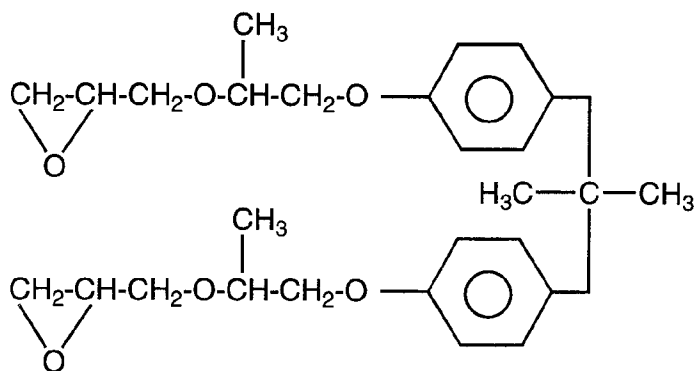


- 22) Dibromo neopentyl glycol (diglycidyl ether)

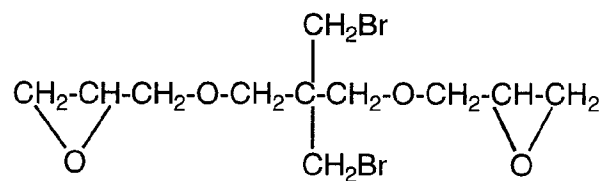


- 23) Epicion HP-4032

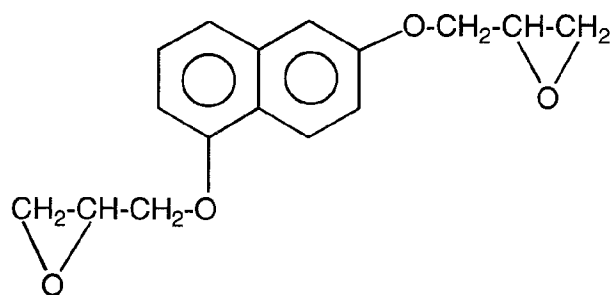


- 5 24) N,N-Diglycidyl aniline

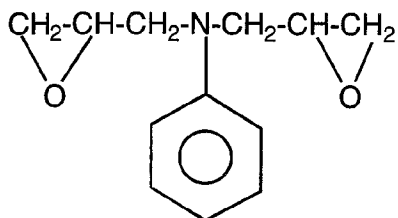


- 25) 3,4-Epoxy-6-methylcyclohexyl-methy-3,4-epoxy-6-methylcyclohexane carboxylate

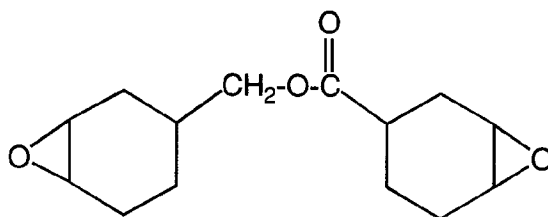

26) EPPN-201

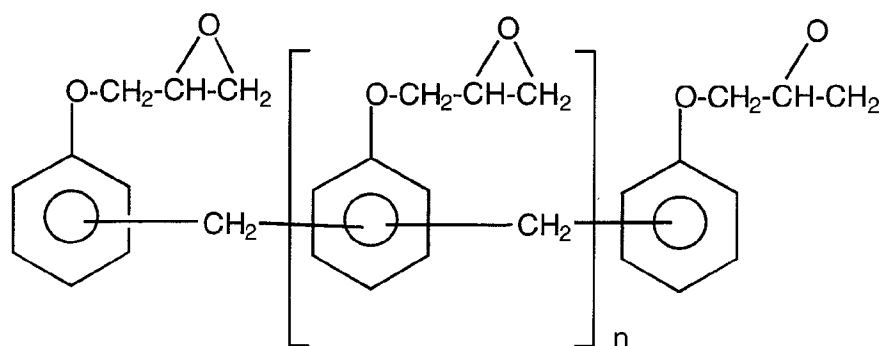


27) Oxiranemethanamine; N-(2-methylphenyl)-N-(oxiranylmethyl)- N,N-Diglycidyl-o-toluidine

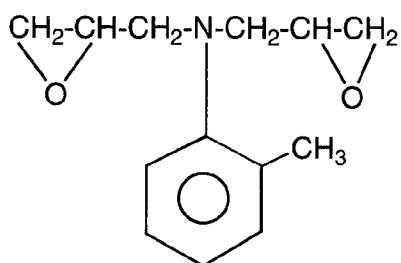


5


28) AK-601

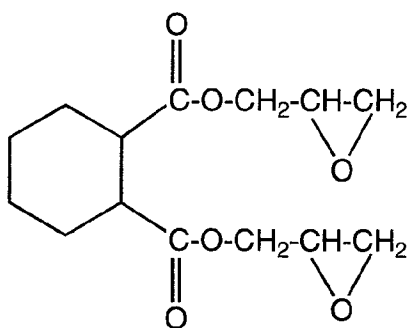


29) DER 331;DER 332

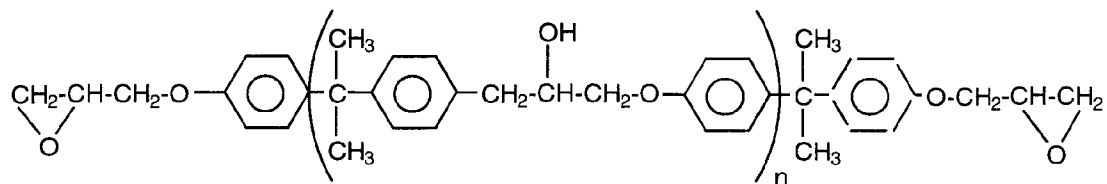


30) MY721 TGDDM

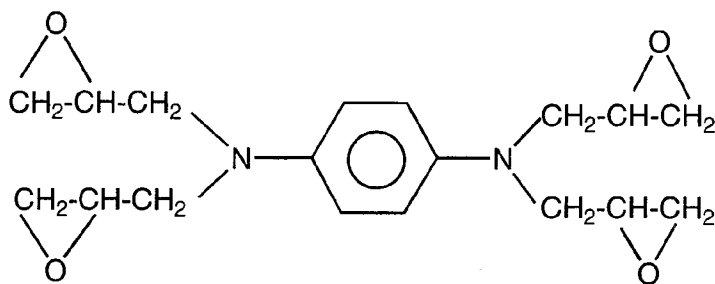


5 31) Epolight 100MF

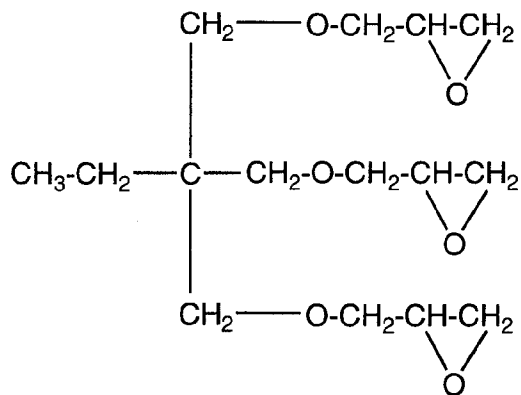


32) AGE (Allyl Glycidyl Ether)




33) GE-510 (Glycidyl Methacrylate)

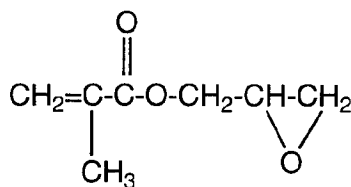


34) BPGE (Bisphenol Fluorene Diglycidyl Ether)

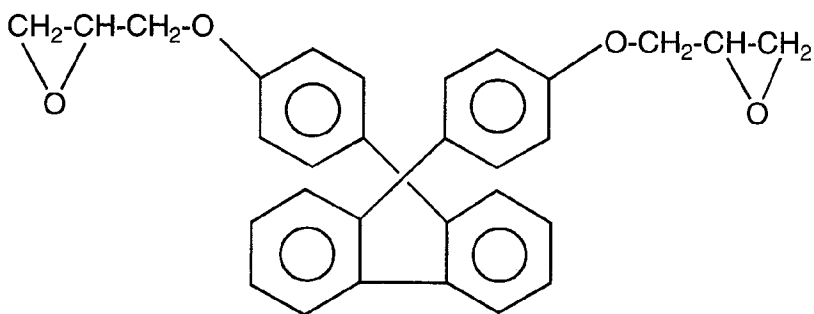

5 35) Glycidyl Ether of 4-Hydroxyphenyl sulfone

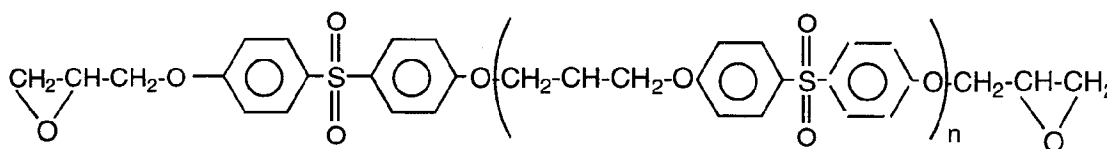

36) Diglycidyl Ether of Bisphenol F

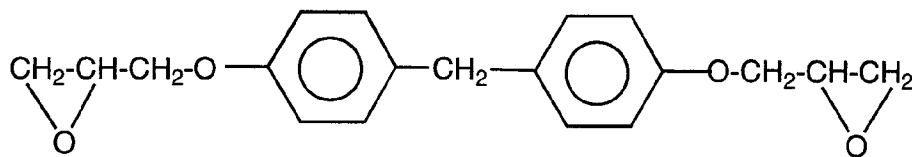

The epoxidised monomer may be present in amounts of from approximately 0.001% to 20% by weight, preferably 0.01% to 5%, based on the total weight of the primer coating composition (excluding solvent if any).

Where a vinyl comonomer is included, the vinyl comonomer may be

selected from styrene, substituted styrenes, 3,9-divinyl-2,4,8,10-tetraoxaspiro[5.5]undecane (DTU), a divinyl ester monomer of a bi- or polycyclic compound and mixtures thereof. The divinyl ester monomer of a bi- or polycyclic compound may be of the type described in copending provisional patent
5 application entitled "UV Curable High Index Vinyl Esters" to Applicants, the entire disclosure of which is incorporated herein by reference.

The vinyl comonomers may be present in amounts of from 0 to approximately 20% by weight, preferably approximately 5 to 15% by weight, based on the total weight of the casting composition.

10 Where a thiodiacrylate or dimethacrylate is included, the thiodiacrylate or dimethacrylates may be selected from bis(4-methacryloylthioethyl)sulfide (BMTES) and bis(4-methacryloylthiophenyl)sulfide (BMTS). The thioacrylate or methacrylate may be present in amounts of from 0 to approximately 20% by weight, preferably approximately 5 to 15% by weight, based on the total weight of
15 the casting composition.

Where a fluorene diacrylate or dimethacrylate is included, the fluorene diacrylate or dimethacrylate monomer may be selected from a bisphenol fluorene dihydroxy acrylate (BFHA) or a bisphenol fluorene dimethacrylate (BFMA) or mixtures thereof.

20 The fluorene diacrylate or dimethacrylate monomer may be present in amounts of from 0 to approximately 20% by weight, preferably approximately 1 to 10% by weight.

The polyoxy alkylene glycol diacrylate or dimethacrylate compound according to the present invention, when present, may include ethylene oxide or
25 propylene oxide repeating units in its backbone. A polyethylene glycol dimethacrylate is preferred. Suitable materials include dimethylacrylates where the number of repeating ethylene oxide groups is between 4 and 14. Suitable materials include those sold under the trade names NK Ester 4G, 6G, 9G or 16G. A 9G monomer is preferred.

The polyoxy alkylene glycol diacrylate or dimethacrylate component may be present in amounts of from 0 to approximately 20% by weight, preferably approximately 5% to 15% by weight, based on the total weight of the casting composition.


- 5 The high index bisphenol monomer component in the cross-linkable casting composition when present may be selected from: dimethacrylate and diacrylate esters of bisphenol A; dimethacrylate and diacrylate esters of 4,4'-bishydroxy-ethoxy-bisphenol A and the like.

- 10 Preferred high index bisphenol compounds include bisphenol A ethoxylated dimethacrylate and tetra brominated bisphenol A ethoxylated dimethacrylates. A bisphenol A ethoxylate dimethacrylate sold under the trade designation ATM 20 by Ancomer has been found to be suitable.

- 15 The high index bisphenol monomer may be present in amounts of from 0 to approximately 20% by weight, preferably 5 to 15% by weight based on the total weight of the casting composition.

The high rigidity, low colour dispersion (High Abbe number) acrylic or methacrylic monomer, when present, may be selected from acrylates or methacrylate derivatives of a cycloolefin. An acrylate or methacrylate derivative of tricyclodecane is preferred.


- 20 The acrylate or methacrylate derivative may be of the formula:

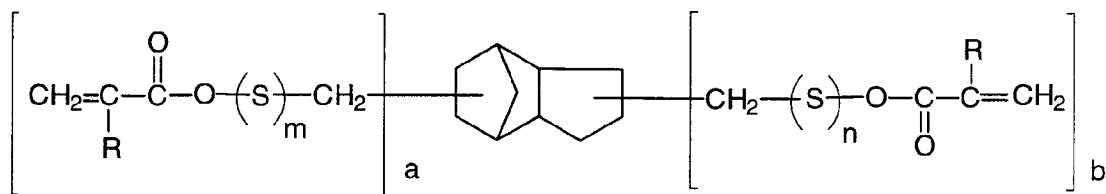

where R can be H or CH₃

a = 1-3, b = 1-3, m = 0-6, n = 0-6.


S is a spacer group selected from one or more of the following

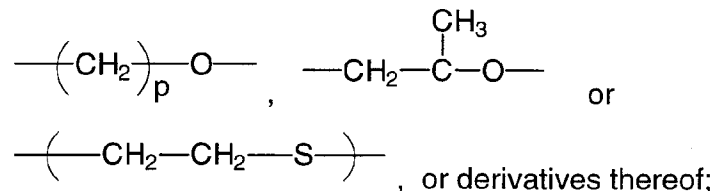

wherein $p = 1-4$

- 5 A tricyclodecane dimethanol diacrylate or methacrylate is preferred.

A tricyclodecane dimethanol diacrylate or diacryloyl oxymethyl tricyclodecane of the following formula is preferred.

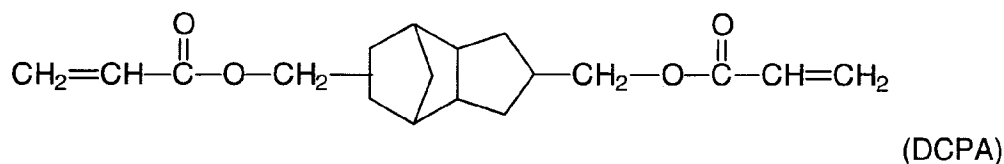

- 10 The highly rigid acrylic or methacrylic monomer, when present, may alternatively be selected from highly rigid, high Abbe No. polyfunctional acrylates or methacrylates. Pentaerythritol tetracrylate (PTA) is a preferred example.

- 15 The highly rigid acrylic or methacrylic monomer may be present in amounts sufficient to provide high Abbe number and high rigidity, but not so much as to cause brittleness. Amounts of from approximately 0 to 20% by weight, preferably approximately 2.5 to 15% by weight, more preferably approximately 2.5 to 10% by weight, based on the total weight of the primer coating composition have been found to be suitable.

- 20 Where an epoxide comonomer is not included, or its adhesion promoting effect is not sufficient, the primer coating composition, in a preferred aspect, may further include an adhesion promoting/modifying comonomer.

The adhesion comonomer may be selected from any one or more of the group consisting of isocyanates, mercaptans, anhydrides, epoxides, silanes,

carboxylic acid, amines, ketones and alcohols.

The adhesion promoting comonomer may be selected from any one or more of the following:

- Triethoxysilane
- 5 • Methyltrimethoxysilane
- Methyltriethoxysilane
- methyltri-n-propoxysilane
- Ethyltrimethoxysilane
- Ethyltriethoxysilane
- 10 • n-Propyltrimethoxysilane
- n-Propyltriethoxysilane
- n-Propyltri-n-propoxysilane
- n-Propyltri-n-butoxysilane
- n-Buthyltrimethoxysilane
- 15 • Vinyltrimethoxysilane
- Vinyltriethoxysilane
- N- β -aminoethyl- γ -aminopropyltrimethoxysilane
- γ -Aminopropyltrimethoxysilane
- γ -Aminopropyltriethoxysilane
- 20 • Chloromethyltrimethoxysilane
- γ -Chloropropyltrimethoxysilane
- Cyclohexyltrimethoxysilane
- β -Cyanoethyltriethoxysilane
- β -(3,4-Epoxycyclohexyl)ethyltrimethoxysilane
- 25 • γ -Glycidoxypropyltrimethoxysilane
- 3-Mercaptopropyltrimethoxysilane
- 3-Methacryloxypropyltrimethoxysilane
- Phenyltrimethoxysilane
- Phenyltriethoxysilane
- 30 • N-(Trimethoxysilylpropyl)imidazole
- 3-Aminopropyltrisilanolate
- Vinyltrisilanolate

- Phthalic anhydride
- Methyl-4-endomethylene-tetrahydrophthalic anhydride
- Hexahydrophthalic anhydride
- Tetrahydrophthalic anhydride
- 5 • Dodecenylsuccinic anhydride
- Succinic anhydride
- Methacrylic anhydride
- 1,6-Hexamethylene diisocyanate
- Isophorone diisocyanate
- 10 • 4,4'-Dicyclohexylmethane diisocyanate
- 1,4-Cyclohexane diisocyanate
- Bis(isocyanatomethyl)cyclohexane
- Tetramethylxylene diisocyanate
- Methyl isocyanate
- 15 • n-butyl isocyanate
- Phenyl isocyanate
- 3-Chlorophenyl isocyanate
- 3,4-Dichlorophenyl isocyanate
- p-Toluenesulfonyl isocyanate
- 20 • Toluene 2,4-diisocyanate
- Toluene 2,6-diisocyanate
- 4,4'-Methylene diphenyl diisocyanate
- 2,4'-methylene diphenyl diisocyanate
- Polymeric methylene diphenyl diisocyanate
- 25 • P-phenylene diisocyanate
- Naphthalene-1,5-diisocyanate

The adhesion promoting comonomer may be present in amounts of from approximately 0.001% to 20% by weight, preferably approximately 0.01% to 10% by weight, based on the total weight of the primer coating composition (excluding
30 solvent if any).

The primer coating composition may further include one or more solvents.

The solvent may be selected from one or more of water, alcohols such as 1-butanol ethanol, and ketones such as methylethyl ketone and methyl isobutyl ketone. However, an advantage of the present invention is that the thiol-based primer coating composition may desirably be prepared without the use of solvents, or with minimal use of solvents, thus greatly simplifying the process and reducing throughput time. This is particularly so where a thin primer coating is to be prepared. Where a solvent is included, the solvent may be present in amounts of from 0 to approximately 95% by weight, based on the total weight of the primer coating composition.

10 The primer coating composition according to the present invention may also contain from 0 to 10% by weight of a colloidal dispersion of a water insoluble dispersant of metals, non-metals, alloys, or salts thereof, such as colloidal silica or antimony oxide. The silica may be in the form of a silicon dioxide (SiO_2) dispersed in a solvent.

15 The primer coating composition according to the present invention may include a polymerisation curing agent.


 The polymerisation curing agent may be selected from one or more of a UV curable (photo) initiator, radical heat cationic or radical initiator. A UV curable photo initiator is preferred. The compositions may be cured by a combination of
20 UV radiation and heat.

 The amount of curing agent may vary with the monomers selected. It has been possible to operate with a relatively low level of curing agent of between approximately 0.05 and 4%, preferably 0.05% to 3.0% by weight.


 The following curing agents have been found to be suitable.

- 25 • Azodiisobutyronitrile
 AIBN (Azo radical heat initiator)


- 2,2'-Azobis (N,N'-dimethyleneisobutyramidine) dihydrochloride

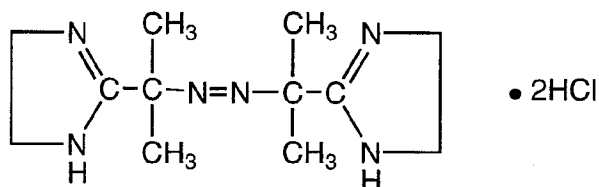


- 2,2'-Azobis (2-amidinopropane) dihydrochloride

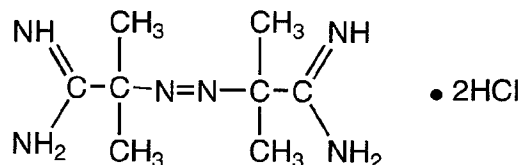


- 5 • 2,2'-Azobis (N,N'-dimethyleneisobutyramidine)

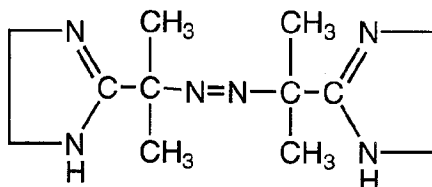


- 4,4'-Azobis (4-cyanopentanoic acid)

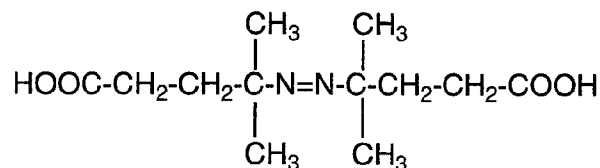


- 10 • 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)-2-hydroxyethyl] propionamide}

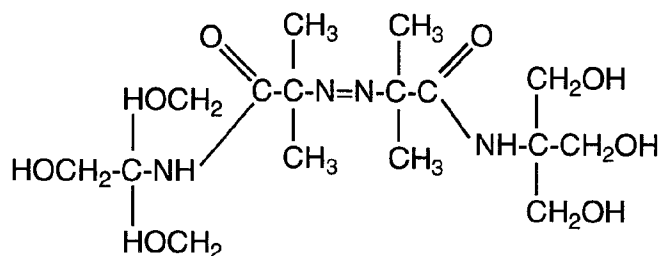


- 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)ethyl] propionamide}

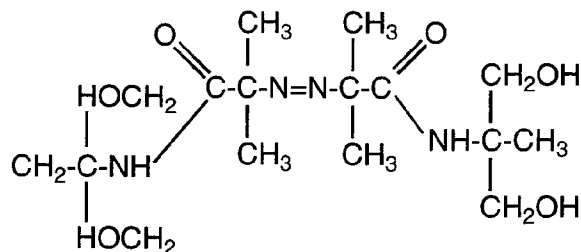


- 2,2'-Azobis [2-methyl-N-(2-hydroxyethyl) propionamide]

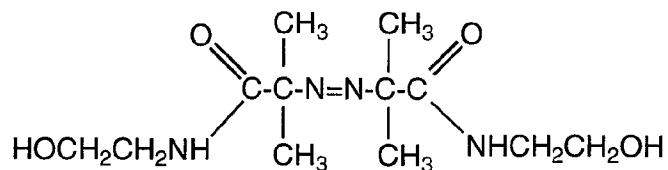


- 5 • 2,2'-Azobis (isobutyramide) dihydrate

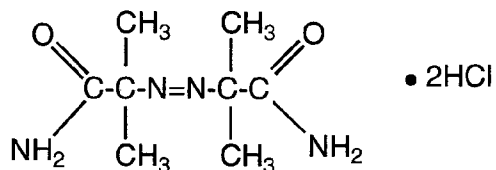


- 2,2'-Azobis (4-methoxy-2,4-dimethylvaleronitrile)

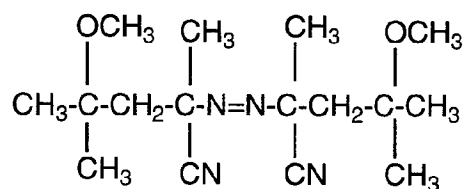


- 2,2'-Azobis (2,4-dimethylvaleronitrile)

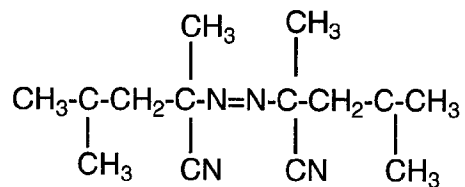


- 2,2'-Azobisisobutyronitrile




- Dimethyl 2,2'-azobis-isobutyrate

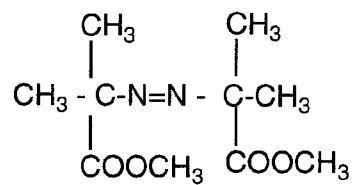


- 5 • 2,2'-Azobis (2-methyl-butynitrile)

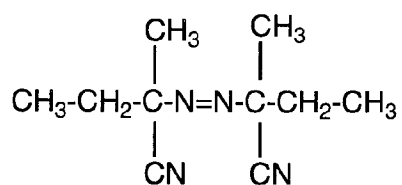


- 1,1'-Azobis (1-cyclohexanecarbonitrile)

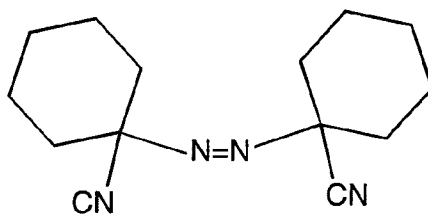


- 2-(Carbamoylazo)-isobutyronitrile




- 2,2'-Azobis (2,4,4-trimethylpentane)

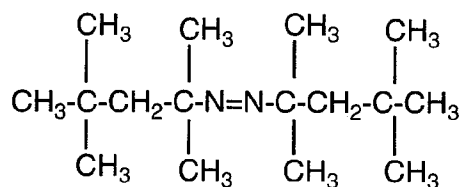

- 2-Phenylazo-2,4-dimethyl-4-methoxyvaleronitrile

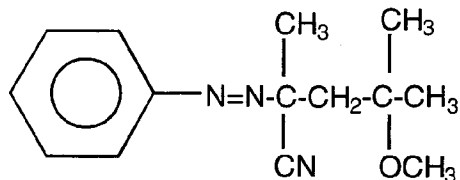

- 5 • 2,2'-Azobis (2-methylpropane)



- Trigonox TX-29 (Dialkyl Peroxide radical heat initiator)
1,1-di-(butyl peroxy-3,3,5-trimethyl cyclohexane)
 - TBPEH (Alkyl Perester radical heat initiator)
- 10 t-butyl per-2-ethylhexanoate
- (Diacyl Peroxide radical heat initiator)
Benzoyl Peroxide
 - (Peroxy Dicarbonate radical heat initiator)
Ethyl Hexyl Percarbonate
- 15 • (Ketone Peroxide radical heat initiator)
Methyl ethyl ketone peroxide
- Cyracure UV1-6974 (cationic photoinitiator)
Triaryl sulfonium hexafluoroantimonate
 - Lucirin TPO (radical photoinitiator)
- 20 2,4,6-Trimethylbenzoyldiphenylphosphine oxide
- Irgacure 819
Bis(2,4,6-trimethylbenzoyl)-phenyl-phosphine oxide

- 1-Bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphineoxide
- Vicure 55 (radical photoinitiator)
methyl phenylglyoxylate
- Bis(t-butyl peroxide) diisopropylbenzene
- 5 • t-butyl perbenzoate
- t-butyl peroxy neodecanoate
- Amicure DBU
- Amicure BDMA
- DABCO
- 10 • polycat SA-1
- polycat SA-102
- polycat SA-610/50
- Aluminium acetyl acetonate
- dibutyltin dilaurate
- 15 • dibutyltin oxide
- Darocur 1173
- Irgacure 184
- Irgacure 500
- Irgacure 1800
- 20 • Irgacure 1850

The initiator may be a single component or combination of initiator components.

- Other additives may be present which are conventionally used in coating compositions such as inhibitors, surfactants, UV absorbers, stabilisers and
- 25 materials capable of modifying refractive index. Such additives may include:

Leveling Agents including

- 3M FC 430
- 3M FC 431

Surfactants including

- 30 • Fluorinated surfactants or polydimethyl siloxane surfactants such as

FC430, FC431 made by 3M, BYK300, BYK371 made by Mallinckrodt, SF-1066, SF-1141 and SF-1188 made by General Electric Company, L-540, L-538 sold by Union Carbide and DC-190 sold by Dow Corning.

UV Absorbers including

- 5 • Ciba Geigy Tinuvin P - 2(2'-hydroxy-5'-methyl phenyl) benzotriazole
- Cyanamid Cyasorb UV 531 -2-hydroxy-4-n-octoxybenzophenone
- Cyanamid Cyasorb UV5411-2(2-hydroxy-5-t-octylphenyl)-benzotriazole
- Cyanamid UV 2098 - 2 hydroxy-4-(2-acryloyloxyethoxy) benzophenone
- National Starch and Chemicals Permasorb MA - 2 hydroxy-4-(2 hydroxy-3-methacryloxy)propoxy benzophenone
- 10 • Cyanamid UV24 - 2,2'-dihydroxy-4-methoxybenzophenone
- BASF UVINUL 400 - 2,4 dihydroxy-benzophenone
- BASF UVINUL D-49 - 2,2'-dihydroxy-4,4' dimethoxy- benzophenone
- BASF UVINUL D-50 - 2,2', 4,4' tetrahydroxy benzophenone
- 15 • BASF UVINUL D-35-ethyl-2-cyano-3,3-diphenyl acrylate
- BASF UVINUL N-539-2-ethylhexyl-2-cyano-3,3-diphenyl acrylate
- Ciba Geigy Tinuvin 213

Stabilisers including

- Hydroquinone

20 Coating solution stabilizers

- Nitroso compounds such as Q1301 and Q1300 from Wako

Hindered amine light stabilisers (HALS), including

- Ciba Geigy Tinuvin 765/292 - bis (1,2,2,6,6-pentamethyl-4-piperidyl) sebacate
- 25 • Ciba Geigy 770 - bis (2,2,6,6-tetramethyl-4- piperidiny) sebacate

Antioxidants including

- Ciba Geigy Irganox 245 - triethylene glycol-bis-3- (3-tertbutyl-4-hydroxy-5-methyl phenyl)propionate
- Irganox 1010 -2,2-bis[[3-[3,4-bis(1,1-dimethylethyl)-4-hydroxyphenyl]-1-

oxopropoxy]methyl]-1,3-propanediyl 3,5-bis(1,1-dimethyl ethyl)-4-hydroxy benzene propanoate

- Irganox 1076 - octadecyl 3-(3',5'-di-tert-butyl(-4'- hydroxyphenyl) propionate
- hydroquinone
- 5 • BHT
- TBC
- MEHQ (4-methoxyphenone)
- 2-ethoxy-5-(propenyl)phenol
- Isoeugenol
- 10 • 2-allyl phenol
- butylated hydroxyanisole

Anticolouring agents including

- 10 dihydro-9-oxa-10-phosphaphenanthrene-1-oxide

Cure modifiers including

- 15 • Dodecyl mercaptan
 - Butyl mercaptan
 - Thiophenol
 - Nitroso compounds such as Q1301 from Wako
 - Nofmer from Nippon Oils and Fats
- 20 Other monomeric additives can be present in amounts up to 10% by weight as viscosity modifiers, and include monomers such as methacrylic acid, vinyl silanes, and other functional monomers. Other monomeric additives may be included to improve processing and/or material properties, these include:
- methacrylic acid, maleic anhydride, acrylic acid
 - 25 • dye-enhancing, pH-adjusting monomers like Alcolac SIPOMER 2MIM
 - a charge-reducing cationic monomer to render the material more antistatic, example Sipomer Q5-80 or Q9-75

The primer coating composition according to the present invention may be utilised in the preparation of a coated optical article, as discussed above.

In a preferred aspect the primer coating exhibits improved impact resistance and/or improved adhesion to the optical article and to a secondary coating, when present.

In an alternative preferred aspect, there is provided a coated optical article
5 including

an optical article; and

an optically clear primer coating on at least one surface of the optical article, the primer coating being receptive to the inclusion of dyes; the primer coating being formed by UV curing a cross-linkable primer coating composition
10 including an effective amount of a di- or polythiol compound.

Preferably the primer coating composition further includes
an allyl or vinyl monomer; and optionally
a polymerisable comonomer.

The composition of primer coating may be tailored so that its refractive
15 index substantially matches that of the optical article. The primer coating may have a thickness in the range of approximately 0.01 to 100 micron (μm). Preferably when the primer coating includes a dye component the coating has a thickness of approximately 10 to 75 micron.

When the primer coating includes a dye component the primer coating is
20 applied to at least the front (convex) surface of the optical article.

Alternatively, when the primer coating functions to provide improved impact resistance to the optical article, the primer coating preferably has a thickness of approximately 0.7 to 5 micron.

The optical article may be a camera lens, optical lens element, video disc
25 or the like. An optical lens element is preferred.

By the term "optical lens element" we mean all forms of individual refractive optical bodies employed in the ophthalmic arts, including, but not limited

to, lenses, lens wafers and semi-finished lens blanks requiring further finishing to a particular patient's prescription. Also included are formers used in the manufacture of progressive glass lenses and moulds for the casting of progressive lenses in polymeric material.

5 Where the optical article is an optical lens, the optical lenses may be formed from a variety of different lens materials, and particularly from a number of different polymeric plastic resins. Medium to high index lens materials, e.g. those based on acrylic or allylic versions of bisphenols or allyl phthalates and the like are particularly preferred. Other examples of lens materials that may be suitable for
10 use with the invention include other acrylics, other allylics, styrenics, polycarbonates, vinylics, polyesters and the like. The lens material "Spectralite" of Applicants or like mid to high index lens materials are particularly preferred. A Finalite-type material of applicants may also be used.

 The utilisation of a primer coating with a Spectralite-type optical lens is
15 particularly advantageous in improving adhesion to a secondary coating, as well as improving the impact resistance of the lens. This is particularly so where an anti-reflective (AR) coating is also included. Such AR coatings may otherwise cause a plastic optical lens to exhibit increased brittleness, for example when heat is applied.

20 A common ophthalmic lens material is diethylene glycol bis (allyl carbonate). One such material is a CR39 (PPG Industries).

 The optical article may be formed from cross-linkable polymeric casting compositions, for example as described in the Applicants United States Patent 4,912,155, United States Patent Application No. 07/781,392, Australian Patent
25 Applications 50581/93 and 50582/93, and European Patent Specification 453159A2, the entire disclosures of which are incorporated herein by reference.

 For example, in Australian Patent Application 81216/87, the entire disclosure of which is incorporated herein by reference, the Applicant describes a cross-linkable casting composition including at least polyoxyalkylene glycol

diacrylate or dimethacrylate and at least one poly functional unsaturated cross-linking agent.

Further, in Australian patent Application 75160/91, the entire disclosure of which is incorporated herein by reference, the Applicants describe a
5 polyoxyalkylene glycol diacrylate or dimethacrylate; a monomer including a recurring unit derived from at least one radical-polymerisable bisphenol monomer capable of forming a homopolymer having a high refractive index of more than 1.55; and a urethane monomer having 2 to 6 terminal groups selected from a group comprising acrylic and methacrylic groups.

10 Where the optical article is an ophthalmic lens, the primer coating may be applied to the front and/or back surface of the lens. Preferably, for impact improvement the primer coating is applied to the back (concave) surface only of the lens. For photochromic applications the primer layer is applied preferably to the front (convex) surface only of the lens.

15 The coated optical article may further include one or more additional coatings. Accordingly in a further aspect of the present invention there is provided a multi-coated optical article including

an optical article; and

20 a primer coating on at least one surface of the optical article, the optical clear primer coating formed from a primer coating composition including an effective amount of

a di- or polythio compound;

an allyl or vinyl monomer; and optionally

a polymerisable comonomer; and

25 a secondary coating which provides a desirable optical and/or mechanical property to the optical article, which coating at least in part overlays the primer coating.

The optical article may be an optical lens element, as described above.

In a preferred aspect, one or both surfaces of the optical article may be

subjected to a surface treatment to improve bondability and/or compatibility of the primer and/or secondary coating. The surface treatment may be selected from one or more of the group consisting of chemical treatment such as a caustic treatment and/or utilisation of an adhesion promoter for example (as described
5 above), or physical treatment such as plasma discharge, corona discharge, glow discharge, ionising radiation, UV radiation, flame treatment and laser, preferably excimer laser, treatment. A UV radiation, corona discharge and/or caustic treatment is preferred.

The secondary coating may be of any suitable type. The secondary
10 coating may be one or more of a tint coating, including a photochromic coating, polarising coating, an anti-reflective, abrasion resistance or impact resistant coating.

Accordingly in a preferred aspect there is provided a multi-coated optical article including

- 15 an optical article;
- a primer coating on at least one surface of the optical article, the primer coating formed from a primer coating composition including an effective amount of
 - a di- or polythio compound;
 - an allyl or vinyl monomer; and optionally
 - 20 a polymerisable comonomer; and
- a secondary anti-reflective and/or abrasion resistance coating, which coating at least in part overlays the primer coating; wherein the primer coating provides improved impact resistance to the optical article.

Preferably the optical article is an optical lens, more preferably a
25 polycarbonate or Spectralite-type lens. As stated above, an anti-reflective coating may cause a plastic optical lens, e.g. a Spectralite-type lens, to exhibit increased brittleness. The inclusion of a primer coating provides an improvement in impact resistance to at least in part compensate for the brittle coating.

An abrasion-resistant (hard) coating may also be included. The
30 combination of an abrasion resistant coating and an anti-reflective coating is

particularly preferred. The anti-reflective (AR) coating may overlay the abrasion resistant coating. An abrasion-resistant coating including an organosilicone resin is preferred. A typical organosilicone resin that is suitable for use in the present invention has a composition comprising one or more of the following:

- 5 1) organosilane compounds with functional and/or non-functional groups such as glycidoxypopyl trimethoxy silane;
- 2) co-reactants for functional groups of functional organosilanes, such as organic epoxies, amines, organic acids, organic anhydrides, imines, amides, ketamines, acrylics, and isocyanates; colloidal silica, sols and/or
10 metal and non-metal oxide sols; catalysts for silanol condensation, such as dibutyltin dilaurate;
- 3) solvents such as water, alcohols, and ketones;
- 4) other additives, such as fillers;

Abrasion resistant coats of acrylic, urethane, melamine, and the like may
15 also be used. These materials, however, frequently do not have the good abrasion resistant properties of organo-silicone hard coatings.

The abrasion-resistant (hard) coating may be coated by conventional methods such as dip coating, spray coating, spin coating, flow coating and the like. Coating thicknesses of between approximately 0.5 and 10 microns are
20 preferred for abrasion and other properties.

The secondary coating may alternatively, or in addition, include a single or multi-layer anti-reflective coating. Multi-layer anti-reflective coatings are preferred from an optical performance viewpoint. Examples of materials useful in forming anti-reflective coatings include oxides, fluorides, silicides, borides, carbides,
25 nitrides and sulfides of metal and non-metals and metals.

More specifically, metal oxides which are useful for forming anti-reflective coatings include SiO , SiO_2 , ZrO_2 , Al_2O_3 , TiO , TiO_2 , Ti_2O_3 , Y_2O_3 , Yb_2O_3 , MgO , Ta_2O_5 , CeO_2 and HfO_2 . Fluorides which may be used include MgF_2 , AlF_3 , BaF_2 , CaF_2 , Na_3AlF_6 , Ta_2O_5 , and $\text{Na}_5\text{Al}_3\text{F}_{14}$. Metals which may be used include Cr, W
30 and Ta. These substances may also be used in the form of mixtures.

The above mentioned substances may be formed into a single layer or multi-layer anti-reflective coatings by vacuum evaporation, deposition, sputtering, ion plating, and ion beam assisted methods.

The coated optical article may include a photochromic material or coating.

- 5 The photochromic material may be incorporated into the optical article in any suitable manner, e.g. utilising an imbibing technique or by incorporation into the primer coating composition as discussed below.

- The primer and/or secondary coating, when present, may alternatively or in addition include a photochromic material or coating. The photochromic material
10 may include a photochromic dye.

- The photochromic dye may be of any suitable type. A photochromic dye may be selected from one or more of the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans including spiro-pyrans and fulgides. A spiro-oxazine residue is preferred. The photochromic dye may be
15 selected from any of those described above.

The selection of dyes which may be used may extend to conventional tinting dyes.

- The photochromic material may be introduced to the coated optical article in any suitable manner. The photochromic dye may be incorporated into a
20 polymer carrier or may be directly imbibed into the optical article, the primer, or other secondary coating or any combination thereof.

- In a preferred aspect a photochromic monomer may be incorporated into the composition of the polymeric casting composition, the primer or secondary coating composition or any combination. The photochromic monomer may, for
25 example, be of the type described in International Patent Application PCT/AU96/00466 to applicants, the entire disclosure of which is incorporated herein by reference.

The primer coating composition of the present invention may be applied to the front and/or back surface of the optical article by conventional methods, such as spin coating, flowing, spraying or dipping, to form a continuous coating. A thin coating is preferred. Preferred coating thicknesses which are about 0.1 micron to about 50 microns thick may be obtained by spin coating procedures.

In a preferred aspect of the present invention there is provided a method for preparing a coated optical article which method includes

providing

a mould;

10 a primer coating composition including an effective amount of

a di- or polythio compound;

an allyl or vinyl monomer; and optionally

a polymerisable comonomer; and

a cross-linkable polymeric casting composition;

15 applying a layer of the primer coating composition to at least a first face of a mould used to manufacture the optical article, wherein the first face is capable of imparting a desired optical configuration on the first optical surface of the optical article;

reacting the primer coating composition to a degree that it forms a dry film
20 that is at least weakly adhered to the first face and substantially exactly replicates the first face in an aberration-free manner;

filling the mould with a cross-linkable polymeric casting composition capable of hardening to a solid, room temperature-stable state; and

hardening the casting composition so as to form the optical article and
25 adhere the dry primer coating to the first optical surface.

Coatings applied by the process of the present invention may be thin (typically having a thickness of from about 0.1 to 100 μ , and preferably of from about 0.1 to 50 μ . Furthermore, the coatings are free from surface aberrations due to non-uniformity of the thickness of the coating solution, flow marks, coating
30 build-up, particularly at the segment lines and edges of the optical article. Additionally, they exactly replicate the mould surface from which the ophthalmic

device is made and consequently provide an optical surface having the desired surface configuration.

In a preferred aspect, the hardening step includes introducing

5 a UV cured agent and optionally
a heat curing agent; and
subjecting the casting composition and coating composition to a UV curing step.

The curing agent may be present in an amount of from approximately

10 0.05% to 4% by weight.

The casting composition may be formed into a suitable article by mixing in a convenient vessel the components making up the material, and then adding the curing catalyst. The mixed material may then be degassed or filtered. As the curing time is substantially reduced, the casting process may be undertaken on a

15 continuous or semi-continuous basis.

Where a dye component is to be introduced, a dye, e.g. a photochromic dye, may be included in the primer coating composition.

Alternatively, the method may further include subjecting the coated optical article to an imbibition step to introduce a dye into the primer coating layer.

20 In a further aspect of the present invention there is provided a coated optical article prepared by the method as described above.

The present invention will now be more fully described with reference to the accompanying examples. It should be understood, however, that the description following is illustrative only and should not be taken in any way as a

25 restriction on the generality of the invention described above.

EXAMPLE 1

Thiolene Primer Coating

Thiols are mixed with polyfunctional allyl or vinyl compounds (functionalities from 1 to 8, preferably from 2 to 4) with photoinitiators and suitable
5 solvents. This mix is coated onto the concave side of the lenses by spin coating method and polymerised by UV light. Adhesion improving agent can be used to improve the adhesion of the primer with the lenses. After hard coating and AR coating this primer coating can improve the impact resistance of the lenses comparing with the lenses without primer coating.

10

EXAMPLE 2

Composition	Parts
TAIC	15.5
PTMP	13.0
3-mercaptopropyl-trimethoxy silane	15.0
methyl isobutyl ketone	26.0
1-butanol	13.0
darocur 1173	1.5
surfactant (FC430)	0.5
water (pH=1)	2.0
methanol	13.0

This primer coating was spin coated on the concave side of the lenses of CR-39, Spectralite and special high index material. After UV cure (fusion, D lamp), the lenses were coated on both sides with conventional hard coating and
15 AR coating. The impact test showed that the lenses with above primer coating are more impact resistant than the ones without.

This primer coating has a refractive index of 1.54, it suits lenses with

refractive index from 1.52 to 1.56.

EXAMPLE 3

Composition	Parts
TAIC	14.5
MDO	10
3-mercaptopropyl-trimethoxy silane	11.5
methyl isobutyl ketone	36
1-butanol	12.5
darocur 1173	0.5
surfactant (FC430)	0.05
water (pH=1)	1.5
methanol	12

This primer coating was spin coated on the concave side of the lenses of
5 CR-39, Spectralite and a special high index material. After UV cure (fusion, D
lamp), the lenses were coated on both sides with traditional hard coating and AR
coating. The impact test showed that the lenses with above primer coating are
more impact resistant than the ones without.

This primer coating has a refractive index of 1.60, it suits lenses with
10 refractive index from 1.58 to 1.62.

EXAMPLE 4

Composition	Parts
TAIC	19
PTMP	20
3-mercaptopropyl-trimethoxy silane	14
methyl isobutyl ketone	36
1-butanol	9.5
darocur 1173	1
surfactant (FC430)	0.5
hydroquinone	0.2

This primer coating was spin coated on the concave side of the lenses of CR-39, Spectralite and a special high index material. After UV cure (fusion, D lamp), the lenses were coated on both sides with traditional hard coating. The impact test showed that the lenses with above primer coating are more impact resistant than the ones without.

This primer coating has a refractive index of 1.54, it suits lenses with refractive index from 1.52 to 1.56.

10

EXAMPLE 5

Composition	Parts
TAIC	26
MDO	22
methyl isobutyl ketone	29.5
1-butanol	10.5
darocur 1173	1.0
surfactant (FC430)	0.05
3-mercaptopropyl-trimethoxy silane	10
hydroquinone	0.5

This primer coating was spin coated on the concave side of the lenses of CR-39, Spectralite and a special high index material. After UV cure (fusion, D lamp), the lenses were coated on both sides with traditional hard coating and AR coating. The adhesion of the coating to the lens is good. The impact test showed that the lenses with above primer are more impact resistant than the ones without.

This primer coating has a refractive index of 1.60, it suits lenses with refractive index from 1.58 to 1.62.

10

EXAMPLE 6

Composition	Parts
TAIC	23
PTMP	14.5
GDMP	14.5
MPTMS	7
hydroquinone	0.5
Darocur 1173	0.5
methyl isobutyl ketone	31.5
1-butanol	8
FC 430	0.05

GDMP = glycol dimercapto propionate

MPTMS = mercapto propyl trimethyloxy silane

Example 5 was repeated utilising the above composition. The primer coating so formed has a refractive index of 1.54 it suits lenses with refractive index from 1.52 to 1.56.

15

EXAMPLE 7

Composition	Parts
Vectomer 2020	6.06
TAIC	8.62
TTMP	12.26
3-mercaptopropyl-trimethoxy silane	2.59
methyl isobutyl ketone	51.40
1-butanol	18.50
darocur 1173	0.23
surfactant (FC430)	0.11

This formulation is for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave side were treated with corona discharge.

- 5 Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice) a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

- 10 This primer has a refractive index 1.53, it suit lenses with refractive index from 1.51 to 1.55.

EXAMPLE 8

Composition	Parts
Vectomer 2020	3.33
TAIC	9.69
TTMP	13.59
3-mercaptopropyl-trimethoxy silane	2.87
methyl isobutyl ketone	51.40
hydroquinone	0.26
1-butanol	18.50
darocur 1173	0.26
surfactant (FC430)	0.11

This formulation is for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave side were treated with corona discharge.

- 5 Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice) a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

- 10 This primer has a refractive index 1.53, it suit lenses with refractive index from 1.51 to 1.55.

EXAMPLE 9

Composition	Parts
Vectomer 2020	10.25
TAIC	7.10
TTMP	11.24
3-mercaptopropyl-trimethoxy silane	1.12
methyl isobutyl ketone	51.40
hydroquinone	0.20
1-butanol	18.50
darocur 1173	0.10
surfactant (FC430)	0.11

This formulation is for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave side were treated with corona discharge.

- 5 Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice) a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

- 10 This primer has a refractive index 1.53, it suit lenses with refractive index from 1.51 to 1.55.

EXAMPLE 10

Composition	A	B	C	D
TAIC	10.92	11.32	11.05	11.38
TTMP	15.28	12.68	12.37	11.47
MDO		2.07		2.08
TMPIC			2.72	1.12
MPTMS	3.23	3.35	3.27	3.36
methyl isobutyl ketone	51.40	51.40	51.40	51.40
hydroquinone	0.29	0.29	0.29	0.29
1-butanol	18.50	18.50	18.50	18.50
darocur 1173	0.29	0.29	0.29	0.29
surfactant (FC430)	0.11	0.11	0.11	0.11
Refractive index	1.55	1.55	1.55	1.55

These formulations are for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave sides were treated with corona discharge. Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice) a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

10 These primers have a refractive index 1.53, it suit lenses with refractive index from 1.51 to 1.57.

EXAMPLE 11

Composition	Parts
TAIC	12.95
MDO	11.14
3-mercaptopropyl-trimethoxy silane	5.04
methyl isobutyl ketone	51.40
hydroquinone	0.29
1-butanol	18.50
darocur 1173	0.59
surfactant (FC430)	0.11

5 This formulation is for improving the impact resistance of lenses. Before coating, the Finalite lens' concave side were treated with corona discharge. Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice) a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

10 This primer has a refractive index 1.60, it suit lenses with refractive index from 1.58 to 1.62.

EXAMPLE 12

Composition	Parts
CR-39	15.16
TMPIC	11.00
3-mercaptopropyl-trimethoxy silane	3.25
methyl isobutyl ketone	51.40
hydroquinone	0.29
1-butanol	18.50
darocur 1173	0.29
surfactant (FC430)	0.11

5 This formulation is for improving the impact resistance of lenses. Before coating, the CR-39 lens' concave side were treated with corona discharge. Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice) a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

10 This primer has a refractive index 1.52, it suit lenses with refractive index from 1.50 to 1.54.

EXAMPLE 13

Composition	A	B	C
Vectomer 2020	5.98	5.96	5.91
TAIC	8.52	8.52	8.52
TTMP	14.00	14.00	14.00
Epolight 100MF	1.00	1.00	1.00
methyl isobutyl ketone	51.40	51.40	51.40
hydroquinone	0.23	0.23	0.23
1-butanol	18.50	18.50	18.50
Q 1301	0.01	0.01	0.01
polycat SA-1	0.1	0.1	0.1
Darocur 1173	0.23	0.23	0.23
surfactant (FC430)	0.03	0.05	0.10

These formulations are for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave sides treated with corona discharge.

- 5 Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice), a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with the above primer are much more impact resistant than the ones without.

- 10 These primer has a refractive index 1.53, it suits with refractive index from 0.51 to 1.55.

EXAMPLE 14

Composition	A	B	C	D
Vectomer 2020	5.48	4.88	6.00	8.15
TAIC	7.79	6.94	7.79	7.05
TTMP	15.31	16.75	14.79	13.38
Epilight 100MF	0.9	0.9	0.9	0.9
methyl isobutyl ketone	51.45	51.45	51.45	51.45
hydroquinone	0.21	0.21	0.21	0.21
1-butanol	18.52	18.52	18.52	18.52
Q 1301	0.01	0.01	0.01	0.01
polycat SA-1	0.09	0.09	0.09	0.09
Darocur 1173	0.21	0.21	0.21	0.21
surfactant (SF1188)	0.03	0.03	0.03	0.03

These formulations are for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave sides were treated with corona discharge. Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice), a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

These primer has a refractive index 1.53, it suit lenses with refractive index from 1.51 to 1.55.

EXAMPLE 15

Composition	A	B	C	D
Vectomer 2020	5.48	4.88	6.00	8.15
TAIC	7.79	6.94	7.79	7.05
TTMP	15.31	16.75	14.79	13.38
Epilight 100MF	0.9	0.9	0.9	0.9
methyl isobutyl ketone	51.45	51.45	51.45	51.45
hydroquinone	0.21	0.21	0.21	0.21
1-butanol	18.52	18.52	18.52	18.52
Q 1301	0.01	0.01	0.01	0.01
Aluminium acetyl acetate	0.09	0.09	0.09	0.09
Darocur 1173	0.21	0.21	0.21	0.21
surfactant (SF1188)	0.03	0.03	0.03	0.03

These formulations are for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave sides were treated with corona discharge. Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice), a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses with above primer are much more impact resistant than the ones without.

These primer has a refractive index 1.53, it suit lenses with refractive index from 1.51 to 1.55.

EXAMPLE 16

Composition	A	B	C	D
Vectomer 2020	5.57	4.97	6.09	8.24
TAIC	7.79	6.94	7.79	7.05
TTMP	15.31	16.75	14.79	13.38
Epolight 100MF	0.9	0.9	0.9	0.9
methyl isobutyl ketone	51.45	51.45	51.45	51.45
hydroquinone	0.21	0.21	0.21	0.21
1-butanol	18.52	18.52	18.52	18.52
Q 1301	0.01	0.01	0.01	0.01
Darocur 1173	0.21	0.21	0.21	0.21
surfactant (SF1188)	0.03	0.03	0.03	0.03

These formulations are for improving the impact resistance of lenses. Before coating, the Spectralite lens' concave sides were treated with corona discharge. Then the above primer coating was spin coated on the concave side of the lenses. After UV cure (fusion, D lamp, belt speed 70mm/s, twice) a 2 micron thick primer coating was obtained. The lenses were then coated on both sides with hard coating and AR coating. The impact test showed that the lenses were above primer are much more impact resistant than the ones without.

10 These primer has a refractive index 1.53, it suit lenses with refractive index from 1.51 to 1.55.

EXAMPLE 17

	A	B	C	D	E	F
TAIC	38.12	37.74	35.04	37.37	37.01	36.66
PTMP	56.93	45.10	52.34	33.49	22.11	10.95
TTMP	0	12.25	0	24.28	36.07	47.62
Epilight 100MF	2.93	2.90	10.76	2.87	2.84	2.81
Hydroquinone	0.96	0.95	0.88	0.94	0.93	0.92
Lucirin TPO	0.66	0.65	0.60	0.64	0.64	0.63
Triallyl amine	0.33	0.32	0.30	0.32	0.32	0.32
FC430	0.08	0.08	0.08	0.08	0.08	0.08

These formulations are for photochromic lenses. Before coating, the lenses convex sides were treated with corona discharge. Then the above primer

5 coating was spin coated on the front side of the lens with appropriate spin speed and time. After UV cure (fusion, D lamp, belt speed 20mm/s, twice) 15 to 30 micron thick primer coating were obtained. After imbibition process, this primer layer become a photochromic layer. The lenses were then coated on both sides with hard coating and AR coating. Such obtained lenses are photochromic

10 lenses.

EXAMPLE 18

	A	B	C	D	E	F
TAIC	36.36	36.00	33.40	35.64	35.30	34.96
PTMP	54.30	43.02	49.90	31.94	21.09	10.44
TTMP	0	11.68	0	23.16	34.40	45.42
Epolight 100MF	2.79	2.77	10.26	2.74	2.71	2.68
Hydroquinone	0.92	0.92	0.84	0.90	0.89	0.88
Photochromic dyes	3.81	3.81	3.81	3.81	3.81	3.81
AIBN	0.48	0.48	0.48	0.48	0.48	0.48
Irgacure 819	0.95	0.95	0.95	0.95	0.95	0.95
Triallyl amine	0.31	0.31	0.31	0.31	0.31	0.31
FC430	0.08	0.08	0.08	0.08	0.08	0.08

These formulations are for photochromic lenses. If necessary a minimum amount of solvent, for example, methyl isobutyl ketone can be used to dissolve the solid components before mix the above formulations. Before coating, the lenses convex sides were treated with corona discharge. Then the above primer coating was spin coated on the front side of the lenses with appropriate spin speed and time. After UV cured (fusion, V lamp, belt speed 20mm/s, 4 times), 15 to 30 micron thick primer coating were obtained. The lenses were then coated on both sides with hard coating and AR coating. Such obtained lenses are photochromic lenses.

Finally, it is to be understood that various other modifications and/or alterations may be made without departing from the spirit of the present invention as outlined herein.

CLAIMS

1. A cross-linkable primer coating composition which is UV curable, exhibits a very short cure time, and includes an effective amount of a di-or polythiol compound.
- 5 2. A primer coating composition according to Claim 1, wherein the composition is UV curable in air.
3. A cross-linkable primer coating composition according to Claim 2, further including an effective amount of an allyl or vinyl monomer; and optionally
10 a polymerisable comonomer.
4. A primer coating composition according to Claim 3, including approximately 15 to 80% by weight, based on the total weight of the primer coating composition (excluding solvent), of a di- or polythiol compound having a functionality of from 2 to 4;
15 approximately 10 to 80% by weight or a di- or poly allyl or vinyl monomer; and
0 to approximately 20% by weight of a polymerisable comonomer selected from one or more of the group consisting of epoxidised monomer or oligomer vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or
20 methacrylates, polymerisable bisphenol monomers, urethane monomers having 2 to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates, and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe number acrylic or methacrylic monomers.
5. A primer coating composition according to Claim 4, wherein the polythiol
25 compound is selected from one or more of the group consisting of
 - 4-mercaptomethyl-3,6-dithia-1,8-octanedithiol [MDO]
 - Trimethylolpropane Tris (3-mercaptopropionate) [TTMP]
 - Pentaerythritol Tetrakis (3-mercaptopropanoate) [PTMA]
 - Trimethylolpropane Tris (3-mercaptopropanoate) [TTMA]

- 4-t-butyl-1,2-benzenedithiol
- Bis-(2-mercaptoethyl)sulfide
- 4,4'-thiodibenzenethiol
- benzenedithiol
- 5 • Glycol Dimercaptoacetate
- Glycol Dimercaptopropionate Ethylene bis(3-Mercaptopropionate)
- Polyethylene Glycol Dimercaptoacetates
- Polyethylene Glycol Di(3-Mercaptopropionates)
- Pentaerythritol Tetrakis (3-mercapto-propionate) [PTMP]
- 10 • Mercapto-methyl tetrahydrothiophene [MMTHT]
- Tris-(3-mercaptopropyl)isocyanurate [TMPIC]
- 2-mercaptoethyl sulphide
- 1,2,3-trimercaptopropane
- 2,2-bis(mercaptomethyl)-1,3-propanedithiol
- 15 • Dipentaerythrithiol
- 1,2,4-trimercaptomethyl benzene
- 2,5-dimercaptomethyl-1,4-dithiane
- BPHE-SH
- 4,8-bis(mercaptomethyl)-3,6,9-trithia-1,11-undecanedithiol
- 20 • 2-mercaptomethyl-2-methyl-1,3-propanedithiol
- DMDO: 1,8-dimercapto-3,6-dioxaoctane
- TGBMA

6. A primer coating composition according to Claim 5, wherein the thiol compound is selected from one or more of the group consisting of 4-mercaptomethyl-3,6-dithia-1,8-octanedithiol, Trimethylolpropane Tris (3-mercaptopropionate) and pentaerythritol tetrakis (3-mercapto-propionate); and pentaerythritol tetrakis(3-merceptoacetate).

7. A primer coating composition according to Claim 4, wherein the allyl or vinyl monomer is selected from the group consisting of one or more of the following:

- 30 • Diallyl isophthalate
- Tetraallyl pyromellitate

- Triallyl trimesate
- Triallyl isocyanurate (TAIC)
- Triallyl cyanurate (TAC)
- Tetraallyloxyethane
- 5 • Triallylamine

8. A primer coating composition according to Claim 7, wherein the allyl compound is a diethylene glycol bis (allyl carbonate) or a triallyl isocyanurate or triallyl cyanurate.

9. A primer coating composition according to Claim 4, wherein the allyl or vinyl
- 10 monomer is an aromatic divinyl, divinyl ether or trivinyl ether monomer or oligomer selected from the group consisting of
- divinyl benzene
 - divinyl naphthene
 - 1-Butanol, 4-ethenyloxy)-benzoate
 - 15 • Cyclohexanemethanol, 4-[(ethenyloxy)methyl]-, benzoate
 - 1,3-Benzenedicarboxylic acid, bis [4-(ethenyloxy)butyl] ester
 - Pentanedioic acid, bis[[4-[(ethenyloxy)methyl]cyclohexyl]methyl]ester
 - Butanedioic acid, bis [4-ethenyloxy)butyl] ester
 - Hexanedioic acid, bis[4-(ethenyloxy)butyl] ester
 - 20 • Carbamic acid, (methylenedi-4,1-phenylene)bis-, bis[4-(ethenyloxy) butyl] ester
 - Carbamic acid, (4-methyl-1,3-phenylene)bis-, bis[4-(ethenyloxy)butyl] ester
 - 1,2,4-Benzenetricarboxylic acid, tris[4-ethenyloxy)butyl] ester
 - Polyester
 - 25 • Aromatic polyester divinyl ether
 - Aromatic polyester divinyl ether
 - Polyfunctional ester
 - Polyfunctional polyester
 - Aromatic urethane divinyl ether
 - 30 • Aliphatic urethane divinyl ether
 - Urethane divinyl ether oligomer

10. A primer coating composition according to Claim 9, wherein the vinyl monomer is an aliphatic urethane divinyl ether.

11. A primer coating composition according to Claim 4, wherein the copolymerisable monomer is an epoxidised monomer or oligomer and is present
5 in an amount effective to improve the curing characteristics of the coating composition and/or adhesion characteristics of a coating formed therefrom, the epoxidised monomer being selected from one or more of the group consisting of the following

- Epoxidised soybean oil
- 10 • Propylene Oxide
- Hexanediol diglycidyl ether (HDGE)
- epoxy butane
- Bisphenol fluorene diglycidyl ether (BPGE)
- Epolight 100MF
- 15 • AK-601
- MY 721
- Alkyl (C12~13) (glycidyl ether)
- Ethylene glycol (diglycidyl ether)
- PEG#200 (diglycidyl ether)
- 20 • PEG#400 (diglycidyl ether)
- Propylene glycol (diglycidyl ether)
- Tripropylene glycol (diglycidyl ether)
- PPG#400 (diglycidyl ether)
- Neopentyl glycol (diglycidyl ether)
- 25 • 1-6-hexanediol (diglycidyl ether)
- Glycerin (diglycidyl ether)
- Trimethylolpropane (triglycidyl ether)
- Hydrogenize bisphenol A (diglycidyl ether)
- Diglycidyl ether of propylene oxide modified (bisphenol A)
- 30 • Dibromo neopentyl glycol (diglycidyl ether)
- Epicion HP-4032
- N,N-Diglycidyl aniline

- 3,4-Epoxy-6-methylcyclohexyl-methy-3,4-epoxy-6-methylcyclohexane carboxylate
 - EPPN-201
 - Oxiranemethanamine; N-(2-methylphenyl)-N-(oxiranylmethyl)-
 - 5 N,N-Diglicidyl-o-toluidyne
 - AK-601
 - DER 331;DER 332
 - MY721 TGDDM
 - Epolight 100MF
 - 10 • AGE (Allyl Glycidyl Ether)
 - GE-510 (Glycidyl Methacrylate)
 - BPGE (Bisphenol Fluorene Diglycidyl Ether)
 - Glycidyl Ether of 4-Hydroxyphenyl sulfone
 - Diglycidyl Ether of Bisphenol F
- 15 12. A primer coating composition according to Claim 3, further including approximately 0.001 to 20% by weight, based on the total weight of the primer coating composition (excluding solvent), an adhesion promoting/modifying comonomer selected from one or more of the group consisting of isocyanates, mercaptans, anhydrides, silanes, carboxylic acid, amines, ketones and alcohols.
- 20 13. A primer coating composition according to Claim 12, wherein the adhesion promoting comonomer is a silane.
14. A primer coating composition according to Claim 3, further including approximately 0.05 to 4% by weight, based on the total weight of the primer coating composition (excluding solvent), of a curing agent selected from one or
- 25 more of the group consisting of
- Azodiisobutyronitrile (AIBN)
 - 2,2'-Azobis (N,N'-dimethyleneisobutyramidine) dihydrochloride
 - 2,2'-Azobis (2-amidinopropane) dihydrochloride
 - 2,2'-Azobis (N,N'-dimethyleneisobutyramidine)
 - 30 • 4,4'-Azobis (4-cyanopentanoic acid)
 - 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)-2-hydroxyethyl] propion-

- amide}
- 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)ethyl] propionamide}
- 2,2'-Azobis [2-methyl-N-(2-hydroxyethyl) propionamide]
- 2,2'-Azobis (isobutyramide) dihydrate
- 5 • 2,2'-Azobis (4-methoxy-2,4-dimethylvaleronitrile)
- 2,2'-Azobis (2,4-dimethylvaleronitrile)
- 2,2'-Azobisisobutyronitrile
- Dimethyl 2,2'-azobis-isobutyrate
- 2,2'-Azobis (2-methyl-butyronitrile)
- 10 • 1,1'-Azobis (1-cyclohexanecarbonitrile)
- (Carbamoylazo)-isobutyronitrile
- 2,2'-Azobis (2,4,4-trimethylpentane)
- 2-Phenylazo-2,4-dimethyl-4-methoxyvaleronitrile
- 2,2'-Azobis (2-methylpropane)
- 15 • Trigonox TX-29 (Dialkyl Peroxide radical heat initiator)
- 1,1-di-(-butyl peroxy-3,3,5-trimethyl cyclohexane)
- TBPEH (Alkyl Perester radical heat initiator)
- t-butyl per-2-ethylhexanoate
- (Diacyl Peroxide radical heat initiator)
- 20 Benzoyl Peroxide
- (Peroxy Dicarboxate radical heat initiator)
- Ethyl Hexyl Percarbonate
- (Ketone Peroxide radical heat initiator)
- Methyl ethyl ketone peroxide
- 25 • Cyacure UV1-6974 (cationic photoinitiator)
- Triaryl sulfonium hexafluoroantimonate
- Lucirin TPO (radical photoinitiator)
- 2,4,6-Trimethylbenzoyldiphenyl phosphine oxide)
- Irgacure 819
- 30 Bis(2,4,6-trimethylbenzoyl)-phenyl-phosphine oxide
- 1-Bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphineoxide
- Vicure 55 (radical photoinitiator)
- methyl phenylglyoxylate

- Bis(t-butyl peroxide) diisopropylbenzene
- t-butyl perbenzoate
- t-butyl peroxy neodecanoate
- Amicure DBU
- 5 • Amicure BDMA
- DABCO
- polycat SA-1
- polycat SA-102
- polycat SA-610/50
- 10 • Aluminium acetyl acetonate
- dibutyltin dilaurate
- dibutyltin oxide
- Darocur 1173
- Irgacure 184
- 15 • Irgacure 500
- Irgacure 1800
- Irgacure 1850

15. A primer coating composition according to Claim 3, further including an effective amount of a solvent selected from one or more of the group consisting of water, alcohols and ketones.

16. A primer coating composition according to Claim 3, further including one or more additives selected from the group consisting of inhibitors, surfactants, UV absorbers, stabilisers and materials capable of modifying refractive index.

17. A cross-linkable primer coating composition which is UV curable in the presence of a photochromic dye component, exhibits a very short cure time and includes an effective amount of

- a di- or polythiol monomer;
- an allyl or vinyl monomer;
- a photochromic dye component; and optionally
- 30 a polymerisable comonomer.

18. A primer coating composition according to Claim 17, further including a photochromic dye component selected from one or more of the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans and fulgides.

- 5 19. A primer coating composition according to Claim 18, wherein the photochromic dye is selected from one or more of the group consisting of
- 1,3-dihydrospiro[2H-anthra[2,3-d]imidazole-2,1'-cyclohexane]-5,10-dione
 - 1,3-dihydrospiro[2H-anthra[2,3-d]imidazole-2,1'-cyclohexane]-6,11-dione
 - 1,3-dihydro-4-(phenylthio)spiro[2H-anthra[1,2-d]imidazole-2,1'-
 - 10 cyclohexane]-6,11-dione
 - 1,3-dihydrospiro[2-H-anthra[1,2-d]imidazole-2,1'-cycloheptane]-6,11-dione
 - 1,3,3-trimethylspiroindole-2,3'-[3H]naphtho[2,1-b]-1,4-oxazine]
 - 1,3,3-trimethyl-9'-hydroxyspiroindolenaphthoxadine
 - 1,3,3-trimethyl-9'-(2-hydroxyethoxy)-spiroindolenaphthoxadine
 - 15 • 1,3,3-trimethyl-6'-piperidino-9'-hydroxy-spiroindolenaphthoxadine
 - 2-methyl-3,3'-spirobi[3H-naphtho[2,1-b]pyran] (2-Me)
 - 2-phenyl-3-methyl-7-methoxy-8'-nitrospiro[4H-1-benzopyran-4,3'-[3H]-naphtho[2,1-b]pyran
 - Spiro[2H-1-benzopyran-2,9'-xanthene]
 - 20 • 8-methoxy-1',3'-dimethylspiro(2H-1-benzopyran-2,2'-(1'H)-quinoline
 - 2,2'-Spirobi[2H-1-benzopyran]
 - 5'-amino-1',3',3'-trimethylspiro[2H-1-benzopyran-2,2'-indoline
 - Ethyl-β-methyl-β-(3',3'-dimethyl-6-nitrospiro(2H-1-benzopyran-2,2'-indolin-1'-yl)-propenoate
 - 25 • (1,3-propanediyl)bis[3',3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'-indoline]
 - 3,3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'-benzoxazoline]
 - 6'-methylthio-3,3'-dimethyl-8-methoxy-6-nitrospiro[2H-1-benzopyran-2,2'-benzothiazoline]
 - 30 • (1,2-ethanediyl)bis[8-methoxy-3-methyl-6-nitrospiro[2H-1-benzopyran-2,2'-benzothiazoline]
 - N-N'-bis(3,3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'-(3'H)-

- benzothiazol-6'-yl)decanediamide
- - α -(2,5-dimethyl-3-furyl)ethylidene(Z)-ethylidenesuccinic anhydride; α -(2,5-dimethyl-3-furyl)- α' , δ -dimethylfulgide
 - 2,5-diphenyl-4-(2'-chlorophenyl)imidazole
- 5 • [(2',4'-dinitrophenyl)methyl]-1H-benzimidazole
- N-N-diethyl-2-phenyl-2H-phenanthro[9,10-d]imidazol-2-amine
 - 2-Nitro-3-aminofluoren 2-amino-4-(2'-furyl)-6H-1,3-thiazine-6-thione
20. A coated optical article including
an optical article; and
- 10 a primer coating on at least a surface of the optical article, the primer coating being formed from a primer coating composition which
is UV curable,
exhibits a very short cure time; and
includes an effective amount of a di- or polythio compound.
- 15 21. A coated optical article according to Claim 20, wherein the primer coating provides improved impact resistance to the optical article.
22. A coated optical article according to Claim 20, wherein the primer coating provides improved adhesion between the optical article and a second coating, when present.
- 20 23. A coated optical article according to Claim 20, wherein the primer coating composition further includes
an allyl or vinyl monomer; and optionally
a polymerisable comonomer.
24. A coated optical article according to Claim 23, wherein the primer coating
25 composition includes
approximately 15 to 80% by weight, based on the total weight of the primer coating composition (excluding solvent) of a di- or polythiol compound having a functionality of from 2 to 4;
approximately 10 to 80% by weight of a di- or poly allyl or vinyl monomer;

and

0 to approximately 20% by weight of a polymerisable comonomer selected from one or more of the group consisting of epoxidised monomer or oligomer vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or
5 methacrylates, polymerisable bisphenol monomers, urethane monomers having 2 to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates, and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe number acrylic or methacrylic monomers.

25. A coated optical article according to Claim 20 wherein the optical article is
10 an optical lens.

26. A coated optical lens according to Claim 25 wherein the optical lens is formed from a plastics material.

27. A coated optical lens according to Claim 20 wherein the optical lens is formed from a Polycarbonate, Finalite-type, or Spectralite-type material.

15 28. A coated optical article according to Claim 20, wherein the primer coating has a thickness of approximately 0.1 to 5 micron.

29. A coated optical article including
an optical article; and
a primer coating on at least one surface of the optical article, the primer
20 coating being receptive to the inclusion of dyes; the primer coating being formed by UV curing a cross-linkable primer coating composition including an effective amount of a di- or polythiol compound.

30. A coated optical article according to Claim 29 wherein the primer coating composition further includes
25 an allyl or vinyl monomer; and optionally
a polymerisable comonomer.

31. A coated optical article according to Claim 30 further including an effective

amount of a dye component, which dye component is introduced into the primer coating or included in the primer coating composition.

32. A coated optical article according to Claim 31, wherein the dye component includes a photochromic dye component selected from the group consisting of
5 one or more of the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans including spiro-pyrans and fulgides.

33. A coated optical article according to Claim 31, wherein when the primer coating includes a dye component the primer coating is applied to at least the front (convex) surface of the optical article.

10 34. A coated optical article according to Claim 29, wherein the primer coating has a thickness of from approximately 0.01 to 100 micron (μm).

35. A coated optical article according to Claim 34, wherein when the primer coating includes a dye component the coating has a thickness of approximately 10 to 75 micron.

15 36. A coated optical article according to Claim 29, wherein one or both surface of the optical article is (are) subjected to a surface treatment.

37. A coated optical article according to Claim 36, wherein the surface treatment is a UV radiation, corona discharge, or caustic treatment.

20 38. A multi-coated optical article including
an optical article;
a primer coating on at least one surface of the optical article, the primer coating formed from a primer coating composition including an effective amount of
a di- or polythio compound;
an allyl or vinyl monomer; and optionally
25 a polymerisable comonomer; and
a secondary coating which provides a desirable optical and/or mechanical property to the optical article, which coating at least in part overlays the primer

coating.

39. A multi-coated optical article according to Claim 38, wherein the secondary coating includes an anti-reflective coating and/or an abrasion resistance coating.

40. A multi-coated optical article including

5 an optical article;

a primer coating on at least one surface of the optical article, the primer coating formed from a primer coating composition including an effective amount of a di- or polythio compound;

an allyl or vinyl monomer; and optionally

10 a polymerisable comonomer; and

a secondary anti-reflective and/or abrasion resistance coating, which coating at least in part overlays the primer coating; wherein the primer coating provides improved impact resistance to the optical article.

41. A multi-coated optical article according to Claim 40, wherein the optical
15 article is a lens.

42. A multi-coated optical article according to Claim 41, wherein the optical lens is formed from a polycarbonate or Spectralite-type material.

43. A method for preparing a coated optical article which method includes providing

20 a mould;

a primer coating composition including an effective amount of

a di- or polythio compound;

an allyl or vinyl monomer; and optionally

a polymerisable comonomer; and

25 a cross-linkable polymeric casting composition;

applying a layer of the primer coating composition to at least a first face of a mould used to manufacture the optical article, wherein the first face is capable of imparting a desired optical configuration on the first optical surface of the optical article;

reacting the primer coating composition to a degree that it forms a dry film that is at least weakly adhered to the first face and substantially exactly replicates the first face in an aberration-free manner;

filling the mould with a cross-linkable polymeric casting composition
5 capable of hardening to a solid, room temperature-stable state; and

hardening the casting composition so as to form the optical article and adhere the dry primer coating to the first optical surface.

44. A method according to Claim 43, wherein the primer coating composition includes

10 approximately 15 to 80% by weight, based on the total weight of the primer coating composition (excluding solvent) of a di- or polythiol compound having a functionality of from 2 to 4;

approximately 10 to 80% by weight of a di- or poly allyl or vinyl monomer; and

15 0 to approximately 20% by weight of a polymerisable comonomer selected from one or more of the group consisting of epoxidised monomer or oligomer vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or methacrylates, polymerisable bisphenol monomers, urethane monomers having 2 to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates,
20 and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe number acrylic or methacrylic monomers.

45. A method according to Claim 43, wherein the primer coating composition includes a photochromic dye selected from the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans and
25 fulgides.

46. A method according to Claim 43, wherein the hardening step includes introducing

a UV curing agent and optionally

a heat curing agent; and

30 subjecting the casting composition and coating composition to a UV curing step.

47. A method according to Claim 46, wherein the curing agent is present in an amount of from approximately 0.05 to 4% by weight, and is selected from one or more of the following
- AIBN (Azo radical heat initiator)
 - 5 • Azodiisobutyronitrile
 - 2,2'-Azobis (N,N'-dimethyleneisobutyramidine) dihydrochloride
 - 2,2'-Azobis (2-amidinopropane) dihydrochloride
 - 2,2'-Azobis (N,N'-dimethyleneisobutyramidine)
 - 4,4'-Azobis (4-cyanopentanoic acid)
 - 10 • 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)-2-hydroxyethyl] propionamide}
 - 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)ethyl] propionamide}
 - 2,2'-Azobis [2-methyl-N-(2-hydroxyethyl) propionamide]
 - 2,2'-Azobis (isobutyramide) dihydrate
 - 15 • 2,2'-Azobis (4-methoxy-2,4-dimethylvaleronitrile)
 - 2,2'-Azobis (2,4-dimethylvaleronitrile)
 - 2,2'-Azobisisobutyronitrile
 - Dimethyl 2,2'-azobis-isobutyrate
 - 2,2'-Azobis (2-methyl-butyronitrile)
 - 20 • 1,1'-Azobis (1-cyclohexanecarbonitrile)
 - (Carbamoylazo)-isobutyronitrile
 - 2,2'-Azobis (2,4,4-trimethylpentane)
 - 2-Phenylazo-2,4-dimethyl-4-methoxyvaleronitrile
 - 2,2'-Azobis (2-methylpropane)
 - 25 • Trigonox TX-29 (Dialkyl Peroxide radical heat initiator)
 - 1,1-di-(-butyl peroxy-3,3,5-trimethyl cyclohexane)
 - TBPEH (Alkyl Perester radical heat initiator)
 - t-butyl per-2-ethylhexanoate
 - (Diacyl Peroxide radical heat initiator)
 - 30 • Benzoyl Peroxide
 - (Peroxy Dicarbonate radical heat initiator)
 - Ethyl Hexyl Percarbonate
 - (Ketone Peroxide radical heat initiator)

- Methyl ethyl ketone peroxide
 - Cyracure UV1-6974 (cationic photoinitiator)
 - Triaryl sulfonium hexafluoroantimonate
 - Lucirin TPO (radical photoinitiator)
 - 5 • 2,4,6-Trimethylbenzoyldiphenylphosphine oxide
 - Irgacure 819
 - Bis(2,4,6-trimethylbenzoyl)-phenyl-phosphine oxide
 - 1-Bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphineoxide
 - Vicure 55 (radical photoinitiator)
 - 10 • methyl phenylglyoxylate
 - Bis(t-butyl peroxide) diisopropylbenzene
 - t-butyl perbenzoate
 - t-butyl peroxy neodecanoate
 - Amicure DBU
 - 15 • Amicure BDMA
 - DABCO
 - Amicure DBU and/or Amicure BDMA are preferred
 - polycat SA-1
 - polycat SA-102
 - 20 • polycat SA-610/50
 - Aluminium acetyl acetonate
 - dibutyltin dilaurate
 - dibutyltin oxide
 - Darocur 1173
 - 25 • Irgacure 184
 - Irgacure 500
 - Irgacure 1800
 - Irgacure 1850
48. A method according to Claim 43, further including subjecting the coated
30 optical article to an imbibition step to introduce a dye into the primer coating layer
49. A method according to Claim 48, wherein the dye is a photochromic dye

selected from the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans and fulgides.

50. A coated optical article when prepared by a method according to Claim 43.

51. A coated optical article substantially as hereinbefore described with
5 reference to any one of the examples.

[received by the International Bureau on 7 April 1999 (07.04.99);
 original claims 3, 23, 30 cancelled ;
 original claims 1, 7, 20, 29 and 38 amended;
 new claim 16 added; claims 2 to 5, 7 to 15, 24 to 51 renumbered as claims
 other claims unchanged (16 pages)]

1. A cross-linkable primer coating composition for coating on a surface of an optical article, which composition is UV curable, exhibits a very short cure time, and includes
 - 5 an effective amount of a di-or polythiol compound;
 approximately 10 to 80% by weight of an allyl or vinyl monomer; and
 0 to approximately 20% by weight of a polymerisable comonomer.
2. A primer coating composition according to Claim 1, wherein the composition is UV curable in air.
- 10 3. A primer coating composition according to Claim 2, including
 approximately 15 to 80% by weight, based on the total weight of the primer coating composition (excluding solvent), of a di- or polythiol compound having a functionality of from 2 to 4;
 approximately 10 to 80% by weight of a di- or poly allyl or vinyl monomer;
 15 and
 0 to approximately 20% by weight of a polymerisable comonomer selected from one or more of the group consisting of epoxidised monomer or oligomer vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or methacrylates, polymerisable bisphenol monomers, urethane monomers having 2
 20 to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates, and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe number acrylic or methacrylic monomers.
4. A primer coating composition according to Claim 3, wherein the polythiol compound is selected from one or more of the group consisting of
 - 25 • 4-mercaptomethyl-3,6-dithia-1,8-octanedithiol [MDO]
 - Trimethylolpropane Tris (3-mercaptopropionate) [TTMP]
 - Pentaerythritol Tetrakis (3-mercaptopropanoate) [PTMA]
 - Trimethylolpropane Tris (3-mercaptopropanoate) [TTMA]
 - 4-t-butyl-1,2-benzenedithiol
 - 30 • Bis-(2-mercaptoethyl)sulfide

- 4,4'-thiodibenzenethiol
- benzenedithiol
- Glycol Dimercaptoacetate
- Glycol Dimercaptopropionate Ethylene bis(3-Mercaptopropionate)
- 5 • Polyethylene Glycol Dimercaptoacetates
- Polyethylene Glycol Di(3-Mercaptopropionates)
- Pentaerythritol Tetrakis (3-mercapto-propionate) [PTMP]
- Mercapto-methyl tetrahydrothiophene [MMTHT]
- Tris-(3-mercaptopropyl)isocyanurate [TMPIC]
- 10 • 2-mercaptoethyl sulphide
- 1,2,3-trimercaptopropane
- 2,2-bis(mercaptomethyl)-1,3-propanedithiol
- Dipentaerythrithiol
- 1,2,4-trimercaptomethyl benzene
- 15 • 2,5-dimercaptomethyl-1,4-dithiane
- BPHE-SH
- 4,8-bis(mercaptomethyl)-3,6,9-trithia-1,11-undecanedithiol
- 2-mercaptomethyl-2-methyl-1,3-propanedithiol
- DMDO: 1,8-dimercapto-3,6-dioxaoctane
- 20 • TGBMA

5. A primer coating composition according to Claim 4, wherein the thiol compound is selected from one or more of the group consisting of 4-mercaptomethyl-3,6-dithia-1,8-octanedithiol, Trimethylolpropane Tris (3-mercaptopropionate); pentaerythritol tetrakis (3-mercapto-propionate); and
 25 pentaerythritol tetrakis(3-mercaptoacetate).

6. A primer coating composition according to Claim 3, wherein the allyl or vinyl monomer is selected from the group consisting of one or more of the following:

- Diallyl isophthalate
- Tetraallyl pyromellitate
- 30 • Triallyl trimesate
- Triallyl isocyanurate (TAIC)

- Triallyl cyanurate (TAC)
- Tetraallyloxyethane
- Triallylamine
- Diethylene glycol bis(allyl) carbonate

5 7. A primer coating composition according to Claim 6, wherein the allyl compound is a diethylene glycol bis (allyl) carbonate or a triallyl isocyanurate or triallyl cyanurate.

8. A primer coating composition according to Claim 3, wherein the allyl or vinyl monomer is an aromatic divinyl, divinyl ether or trivinyl ether monomer or oligomer
10 selected from the group consisting of

- divinyl benzene
- divinyl naphthene
- 1-Butanol, 4-ethenyloxy)-benzoate
- Cyclohexanemethanol, 4-[(ethenyloxy)methyl]-, benzoate
- 15 • 1,3-Benzenedicarboxylic acid, bis [4-(ethenyloxy)butyl] ester
- Pentanedioic acid, bis[[4-[(ethenyloxy)methyl]cyclohexyl]methyl]ester
- Butanedioic acid, bis [4-ethenyloxy)butyl] ester
- Hexanedioic acid, bis[4-(ethenyloxy)butyl] ester
- Carbamic acid, (methylenedi-4,1-phenylene)bis-, bis[4-(ethenyloxy) butyl]
20 ester
- Carbamic acid, (4-methyl-1,3-phenylene)bis-, bis[4-(ethenyloxy)butyl] ester
- 1,2,4-Benzenetricarboxylic acid, tris[4-ethenyloxy)butyl] ester
- Polyester
- Aromatic polyester divinyl ether
- 25 • Aromatic polyester divinyl ether
- Polyfunctional ester
- Polyfunctional polyester
- Aromatic urethane divinyl ether
- Aliphatic urethane divinyl ether
- 30 • Urethane divinyl ether oligomer

9. A primer coating composition according to Claim 8, wherein the vinyl

monomer is an aliphatic urethane divinyl ether.

10. A primer coating composition according to Claim 3, wherein the copolymerisable monomer is an epoxidised monomer or oligomer and is present in an amount effective to improve the curing characteristics of the coating composition and/or adhesion characteristics of a coating formed therefrom, the
5 epoxidised monomer being selected from one or more of the group consisting of the following

- Epoxidised soybean oil
- Propylene Oxide
- 10 • Hexanediol diglycidyl ether (HDGE)
- epoxy butane
- Bisphenol fluorene diglycidyl ether (BPGE)
- Epolight 100MF
- AK-601
- 15 • MY 721
- Alkyl (C12~13) (glycidyl ether)
- Ethylene glycol (diglycidyl ether)
- PEG#200 (diglycidyl ether)
- PEG#400 (diglycidyl ether)
- 20 • Propylene glycol (diglycidyl ether)
- Tripropylene glycol (diglycidyl ether)
- PPG#400 (diglycidyl ether)
- Neopentyl glycol (diglycidyl ether)
- 1-6-hexanediol (diglycidyl ether)
- 25 • Glycerin (diglycidyl ether)
- Trimethylolpropane (triglycidyl ether)
- Hydrogenize bisphenol A (diglycidyl ether)
- Diglycidyl ether of propylene oxide modified (bisphenol A)
- Dibromo neopentyl glycol (diglycidyl ether)
- 30 • Epicion HP-4032
- N,N-Diglycidyl aniline
- 3,4-Epoxy-6-methylcyclohexyl-methy-3,4-epoxy-6-methylcyclohexane

carboxylate

- EPPN-201
- Oxiranemethanamine; N-(2-methylphenyl)-N-(oxiranylmethyl)-
N,N-Diglycidyl-o-toluidyne
- 5 • AK-601
- DER 331;DER 332
- MY721 TGDDM
- Epolight 100MF
- AGE (Allyl Glycidyl Ether)
- 10 • GE-510 (Glycidyl Methacrylate)
- BPGE (Bisphenol Fluorene Diglycidyl Ether)
- Glycidyl Ether of 4-Hydroxyphenyl sulfone
- Diglycidyl Ether of Bisphenol F

11. A primer coating composition according to Claim 3, further including
15 approximately 0.001 to 20% by weight, based on the total weight of the primer
coating composition (excluding solvent), an adhesion promoting/modifying
comonomer selected from one or more of the group consisting of isocyanates,
mercaptans, anhydrides, silanes, carboxylic acid, amines, ketones and alcohols.

12. A primer coating composition according to Claim 11, wherein the adhesion
20 promoting comonomer is a silane.

13. A primer coating composition according to Claim 3, further including
approximately 0.05 to 4% by weight, based on the total weight of the primer
coating composition (excluding solvent), of a curing agent selected from one or
more of the group consisting of

- 25 • Azodiisobutyronitrile (AIBN)
- 2,2'-Azobis (N,N'-dimethyleneisobutyramidine) dihydrochloride
- 2,2'-Azobis (2-amidinopropane) dihydrochloride
- 2,2'-Azobis (N,N'-dimethyleneisobutyramidine)
- 4,4'-Azobis (4-cyanopentanoic acid)
- 30 • 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)-2-hydroxyethyl] propion-
amide}

- 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)ethyl] propionamide}
- 2,2'-Azobis [2-methyl-N-(2-hydroxyethyl) propionamide]
- 2,2'-Azobis (isobutyramide) dihydrate
- 2,2'-Azobis (4-methoxy-2,4-dimethylvaleronitrile)
- 5 • 2,2'-Azobis (2,4-dimethylvaleronitrile)
- 2,2'-Azobisisobutyronitrile
- Dimethyl 2,2'-azobis-isobutyrate
- 2,2'-Azobis (2-methyl-butyronitrile)
- 1,1'-Azobis (1-cyclohexanecarbonitrile)
- 10 • (Carbamoylazo)-isobutyronitrile
- 2,2'-Azobis (2,4,4-trimethylpentane)
- 2-Phenylazo-2,4-dimethyl-4-methoxyvaleronitrile
- 2,2'-Azobis (2-methylpropane)
- Trigonox TX-29 (Dialkyl Peroxide radical heat initiator)
- 15 • 1,1-di-(-butyl peroxy-3,3,5-trimethyl cyclohexane)
- TBPEH (Alkyl Perester radical heat initiator)
- t-butyl per-2-ethylhexanoate
- (Diacyl Peroxide radical heat initiator)
- Benzoyl Peroxide
- 20 • (Peroxy Dicarbonate radical heat initiator)
- Ethyl Hexyl Percarbonate
- (Ketone Peroxide radical heat initiator)
- Methyl ethyl ketone peroxide
- Cyracure UV1-6974 (cationic photoinitiator)
- 25 • Triaryl sulfonium hexafluoroantimonate
- Lucirin TPO (radical photoinitiator)
- 2,4,6-Trimethylbenzoyldiphenyl phosphine oxide)
- Irgacure 819
- Bis(2,4,6-trimethylbenzoyl)-phenyl-phosphine oxide
- 30 • 1-Bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphineoxide
- Vicure 55 (radical photoinitiator)
- methyl phenylglycoxylate
- Bis(t-butyl peroxide) diisopropylbenzene

- t-butyl perbenzoate
- t-butyl peroxy neodecanoate
- Amicure DBU
- Amicure BDMA
- 5 • DABCO
- polycat SA-1
- polycat SA-102
- polycat SA-610/50
- Aluminium acetyl acetonate
- 10 • dibutyltin dilaurate
- dibutyltin oxide
- Darocur 1173
- Irgacure 184
- Irgacure 500
- 15 • Irgacure 1800
- Irgacure 1850

14. A primer coating composition according to Claim 3, further including an effective amount of a solvent selected from one or more of the group consisting of water, alcohols and ketones.
- 20 15. A primer coating composition according to Claim 3, further including one or more additives selected from the group consisting of inhibitors, surfactants, UV absorbers, stabilisers and materials capable of modifying refractive index.
16. A cross-linkable primer coating composition for coating on a surface of an optical article, which composition is UV curable, exhibits a very short cure time,
25 and includes
- an effective amount of a di- or polythiol compound selected from one or more of the group consisting of 4-mercaptomethyl-3,6-dithia-1,8-octanedithiol, Trimethylolpropane Tris (3-mercaptopropionate); pentaerythritol tetrakis (3-mercapto-propionate); and pentaerythritol tetrakis(3-merceptoacetate);
- 30 approximately 10 to 80% by weight or a di- or poly allyl or vinyl monomer including an allyl component selected from the group consisting of one or more of

the following:

- Diallyl isophthalate
 - Tetraallyl pyromellitate
 - Triallyl trimesate
 - 5 • Triallyl isocyanurate (TAIC)
 - Triallyl cyanurate (TAC)
 - Tetraallyloxyethane
 - Triallylamine
 - Diethylene glycol bis(allyl) carbonate; and
- 10 0 to approximately 20% by weight of a polymerisable comonomer selected from one or more of the group consisting of epoxidised monomer or oligomer vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or methacrylates, polymerisable bisphenol monomers, urethane monomers having 2 to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates,
- 15 and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe number acrylic or methacrylic monomers.

17. A cross-linkable primer coating composition for coating a surface of an optical article, which composition is UV curable in the presence of a photochromic dye component, exhibits a very short cure time and includes an effective amount

20 of

- a di- or polythiol monomer;
- an allyl or vinyl monomer;
- a photochromic dye component; and optionally
- a polymerisable comonomer.

25 18. A primer coating composition according to Claim 17, further including a photochromic dye component selected from one or more of the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans and fulgides.

19. A primer coating composition according to Claim 18, wherein the

30 photochromic dye is selected from one or more of the group consisting of

- 1,3-dihydrospiro[2H-anthra[2,3-d]imidazole-2,1'-cyclohexane]-5,10-dione

- 1,3-dihydrospiro[2H-anthra[2,3-d]imidazole-2,1'-cyclohexane]-6,11-dione
- 1,3-dihydro-4-(phenylthio)spiro[2H-anthra'1,2-d]imidazole-2,1'-cyclohexane]-6,11-dione
- 1,3-dihydrospiro[2-H-anthra[1,2-d]imidazole-2,1'-cycloheptane]-6,11-dione
- 5 • 1,3,3-trimethylspiroindole-2,3'-[3H]naphtho[2,1-b]-1,4-oxazine
- 1,3,3-trimethyl-9'-hydroxyspiroindolinenaphthoxadine
- 1,3,3-trimethyl-9'-(2-hydroxyethyloxy)-spiroindolinenaphthoxadine
- 1,3,3-trimethyl-6'-piperidino-9'-hydroxy-spiroindolinenaphthoxadine
- 2-methyl-3,3'-spirobi[3H-naphtho[2,1-b]pyran] (2-Me)
- 10 • 2-phenyl-3-methyl-7-methoxy-8'-nitrospiro[4H-1-benzopyran-4,3'-[3H]-naphtho[2,1-b]pyran
- Spiro[2H-1-benzopyran-2,9'-xanthene]
- 8-methoxy-1',3'-dimethylspiro(2H-1-benzopyran-2,2'-(1'H)-quinoline
- 2,2'-Spirobi[2H-1-benzopyran]
- 15 • 5'-amino-1',3',3'-trimethylspiro[2H-1-benzopyran-2,2'-indoline
- Ethyl-β-methyl-β-(3',3'-dimethyl-6-nitrospiro(2H-1-benzopyran-2,2'-indolin-1'-yl)-propenoate
- (1,3-propanediyl)bis[3',3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'-indoline]
- 20 • 3,3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'-benzoxazoline]
- 6'-methylthio-3,3'-dimethyl-8-methoxy-6-nitrospiro[2H-1-benzopyran-2,2'-benzothiazoline]
- (1,2-ethanediyl)bis[8-methoxy-3-methyl-6-nitrospiro[2H-1-benzopyran-2,2'-benzothiazoline]
- 25 • N-N'-bis(3,3'-dimethyl-6-nitrospiro[2H-1-benzopyran-2,2'(3'H)-benzothiazol-6'-yl)decanediamide
- -α-(2,5-dimethyl-3-furyl)ethylidene(Z)-ethylidenesuccinic anhydride; α-(2,5-dimethyl-3-furyl)-α',δ-dimethylfulgide
- 2,5-diphenyl-4-(2'-chlorophenyl)imidazole
- 30 • [(2',4'-dinitrophenyl)methyl]-1H-benzimidazole
- N-N-diethyl-2-phenyl-2H-phenanthro[9,10-d]imidazol-2-amine
- 2-Nitro-3-aminofluoren 2-amino-4-(2'-furanyl)-6H-1,3-thiazine-6-thione

20. A coated optical article including
an optical article; and
a primer coating on at least a surface of the optical article, the primer
coating being formed from a cross-linkable primer coating composition which
5 is UV curable,
exhibits a very short cure time; and
includes
an effective amount of a di-or polythiol compound;
approximately 10 to 80% by weight of an allyl or vinyl
10 monomer; and
0 to approximately 20% by weight of a polymerisable
comonomer.
21. A coated optical article according to Claim 20, wherein the primer coating
provides improved impact resistance to the optical article.
- 15 22. A coated optical article according to Claim 20, wherein the primer coating
provides improved adhesion between the optical article and a second coating,
when present.
23. A coated optical article according to Claim 20, wherein the primer coating
composition includes
20 approximately 15 to 80% by weight, based on the total weight of the primer
coating composition (excluding solvent) of a di- or polythiol compound having a
functionality of from 2 to 4;
approximately 10 to 80% by weight of a di- or poly allyl or vinyl monomer;
and
25 0 to approximately 20% by weight of a polymerisable comonomer selected
from one or more of the group consisting of epoxidised monomer or oligomer
vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or
methacrylates, polymerisable bisphenol monomers, urethane monomers having 2
to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates,
30 and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe
number acrylic or methacrylic monomers.

24. A coated optical article according to Claim 20 wherein the optical article is an optical lens.
25. A coated optical lens according to Claim 24 wherein the optical lens is formed from a plastics material.
- 5 26. A coated optical lens according to Claim 20 wherein the optical lens is formed from a Polycarbonate, Finalite-type, or Spectralite-type material.
27. A coated optical article according to Claim 20, wherein the primer coating has a thickness of approximately 0.1 to 5 micron.
28. A coated optical article including
- 10 an optical article; and
- a primer coating on at least one surface of the optical article, the primer coating being receptive to the inclusion of dyes; the primer coating being formed by UV curing a cross-linkable primer coating composition including an effective amount of a di- or polythiol compound.
- 15 an allyl or vinyl monomer; and optionally
- a polymerisable comonomer.
29. A coated optical article according to Claim 28 further including an effective amount of a dye component, which dye component is introduced into the primer coating or included in the primer coating composition.
- 20 30. A coated optical article according to Claim 29, wherein the dye component includes a photochromic dye component selected from the group consisting of one or more of the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans including spiro-pyrans and fulgides.
31. A coated optical article according to Claim 29, wherein, when the primer
- 25 coating includes a dye component, the primer coating is applied to at least the front (convex) surface of the optical article.

32. A coated optical article according to Claim 28, wherein the primer coating has a thickness of from approximately 0.01 to 100 micron (μm).
33. A coated optical article according to Claim 32, wherein, when the primer coating includes a dye component, the coating has a thickness of approximately
5 10 to 75 micron.
34. A coated optical article according to Claim 28, wherein one or both surface of the optical article is (are) subjected to a surface treatment.
35. A coated optical article according to Claim 34, wherein the surface treatment is a UV radiation, corona discharge, or caustic treatment.
- 10 36. A multi-coated optical article including
an optical article;
a primer coating on at least one surface of the optical article, the primer coating formed from a cross-linkable primer coating composition including an effective amount of
15 a di- or polythio compound;
an allyl or vinyl monomer; and optionally
a polymerisable comonomer; and
a secondary coating which provides a desirable optical and/or mechanical property to the optical article, which coating at least in part overlays the primer
20 coating.
37. A multi-coated optical article according to Claim 36, wherein the secondary coating includes an anti-reflective coating and/or an abrasion resistance coating.
38. A multi-coated optical article including
an optical article;
25 a primer coating on at least one surface of the optical article, the primer coating formed from a primer coating composition including an effective amount of
a di- or polythio compound;
an allyl or vinyl monomer; and optionally

a polymerisable comonomer; and

a secondary anti-reflective and/or abrasion resistance coating, which coating at least in part overlays the primer coating; wherein the primer coating provides improved impact resistance to the optical article.

5 39. A multi-coated optical article according to Claim 38, wherein the optical article is a lens.

40. A multi-coated optical article according to Claim 39, wherein the optical lens is formed from a polycarbonate or Spectralite-type material.

41. A method for preparing a coated optical article which method includes
10 providing
a mould;
a cross-linkable primer coating composition including an effective amount of
a di- or polythio compound;
15 an allyl or vinyl monomer; and optionally
a polymerisable comonomer; and
a cross-linkable polymeric casting composition;
applying a layer of the primer coating composition to at least a first face of
a mould used to manufacture the optical article, wherein the first face is capable of
20 imparting a desired optical configuration on the first optical surface of the optical article;
reacting the primer coating composition to a degree that it forms a dry film that is at least weakly adhered to the first face and substantially exactly replicates the first face in an aberration-free manner;
25 filling the mould with a cross-linkable polymeric casting composition capable of hardening to a solid, room temperature-stable state; and
hardening the casting composition so as to form the optical article and adhere the dry primer coating to the first optical surface.

42. A method according to Claim 41, wherein the primer coating composition
30 includes

approximately 15 to 80% by weight, based on the total weight of the primer coating composition (excluding solvent) of a di- or polythiol compound having a functionality of from 2 to 4;

approximately 10 to 80% by weight of a di- or poly allyl or vinyl monomer;
5 and

0 to approximately 20% by weight of a polymerisable comonomer selected from one or more of the group consisting of epoxidised monomer or oligomer vinyls, allylics, polyoxyalkylene glycol di-, tri-, tetra- and higher acrylates or methacrylates, polymerisable bisphenol monomers, urethane monomers having 2
10 to 6 terminal acrylic or methacrylic groups, fluorene acrylates or methacrylates, and thioacrylate or thiomethacrylate monomers, and high rigidity, high Abbe number acrylic or methacrylic monomers.

43. A method according to Claim 41, wherein the primer coating composition includes a photochromic dye selected from the group consisting of
15 anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans and fulgides.

44. A method according to Claim 41, wherein the hardening step includes introducing
a UV curing agent and optionally
20 a heat curing agent; and
subjecting the casting composition and coating composition to a UV curing step.

45. A method according to Claim 44, wherein the curing agent is present in an amount of from approximately 0.05 to 4% by weight, and is selected from one or
25 more of the following


- AIBN (Azo radical heat initiator)
- Azodiisobutyronitrile
- 2,2'-Azobis (N,N'-dimethyleneisobutyramidine) dihydrochloride
- 2,2'-Azobis (2-amidinopropane) dihydrochloride
- 30 • 2,2'-Azobis (N,N'-dimethyleneisobutyramidine)
- 4,4'-Azobis (4-cyanopentanoic acid)

- 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)-2-hydroxyethyl] propionamide}
- 2,2'-Azobis {2-methyl-N-[1,1-bis(hydroxymethyl)ethyl] propionamide}
- 2,2'-Azobis [2-methyl-N-(2-hydroxyethyl) propionamide]
- 5 • 2,2'-Azobis (isobutyramide) dihydrate
- 2,2'-Azobis (4-methoxy-2,4-dimethylvaleronitrile)
- 2,2'-Azobis (2,4-dimethylvaleronitrile)
- 2,2'-Azobisisobutyronitrile
- Dimethyl 2,2'-azobis-isobutyrate
- 10 • 2,2'-Azobis (2-methyl-butyronitrile)
- 1,1'-Azobis (1-cyclohexanecarbonitrile)
- (Carbamoylazo)-isobutyronitrile
- 2,2'-Azobis (2,4,4-trimethylpentane)
- 2-Phenylazo-2,4-dimethyl-4-methoxyvaleronitrile
- 15 • 2,2'-Azobis (2-methylpropane)
- Trigonox TX-29 (Dialkyl Peroxide radical heat initiator)
- 1,1-di-(-butyl peroxy-3,3,5-trimethyl cyclohexane)
- TBPEH (Alkyl Perester radical heat initiator)
- t-butyl per-2-ethylhexanoate
- 20 • (Diacyl Peroxide radical heat initiator)
- Benzoyl Peroxide
- (Peroxy Dicarboxate radical heat initiator)
- Ethyl Hexyl Percarbonate
- (Ketone Peroxide radical heat initiator)
- 25 • Methyl ethyl ketone peroxide
- Cyracure UV1-6974 (cationic photoinitiator)
- Triaryl sulfonium hexafluoroantimonate
- Lucirin TPO (radical photoinitiator)
- 2,4,6-Trimethylbenzoyldiphenylphosphine oxide
- 30 • Irgacure 819
- Bis(2,4,6-trimethylbenzoyl)-phenyl-phosphine oxide
- 1-Bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentyl phosphineoxide
- Vicure 55 (radical photoinitiator)

- methyl phenylglyoxylate
 - Bis(t-butyl peroxide) diisopropylbenzene
 - t-butyl perbenzoate
 - t-butyl peroxy neodecanoate
 - 5 • Amicure DBU
 - Amicure BDMA
 - DABCO
 - Amicure DBU and/or Amicure BDMA are preferred
 - polycat SA-1
 - 10 • polycat SA-102
 - polycat SA-610/50
 - Aluminium acetyl acetonate
 - dibutyltin dilaurate
 - dibutyltin oxide
 - 15 • Darocur 1173
 - Irgacure 184
 - Irgacure 500
 - Irgacure 1800
 - Irgacure 1850
- 20 46. A method according to Claim 41, further including subjecting the coated optical article to an imbibition step to introduce a dye into the primer coating layer
47. A method according to Claim 46, wherein the dye is a photochromic dye selected from the group consisting of anthraquinones, phthalocyanines, spiro-oxazines, chromenes, pyrans and fulgides.
- 25 48. A coated optical article when prepared by a method according to Claim 41.
49. A coated optical article substantially as hereinbefore described with reference to any one of the examples.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 98/01032

A. CLASSIFICATION OF SUBJECT MATTER																						
Int Cl ⁶ : C09D 7/12, 131/06; C08K 5/37; G02B 1/04; C09D 131/00, 131/08, 139/04; C08F 26/06, 126/06, 226/06, 18/24, 118/00, 218/00, 218/04, 18/16, 118/16, 218/16, 18/18, 118/18, 218/18, 2/48; C08J 7/04																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
B. FIELDS SEARCHED																						
Minimum documentation searched (classification system followed by classification symbols) C09D 7/12, 131/06; C08K 5/37; G01B 1/04; C09D 131/00, 131/08, 139/04; C08F 26/06, 126/06, 226/06, 18/24, 118/00, 218/00, 218/04, 18/16, 118/16, 218/16, 18/18, 118/18, 218/18, 2/48; C08J 7/04																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC as above																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DERWENT: DITHIOL; POLYTHIOL; MERCAPTO-; DIMERCAPTO-																						
C. DOCUMENTS CONSIDERED TO BE RELEVANT																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
X	WO 9744372 A (SOLA INTERNATIONAL HOLDINGS LTD) 27 November 1997 Claims	1-51																				
X	AU 56807/96 A (SOLA INTERNATIONAL HOLDINGS LTD) 5 December 1997 Claims 1, 9-25	1-51																				
X	EP 598551 A (SOLA INTERNATIONAL HOLDINGS LTD) 25 May 1994 Page 5, lines 19-57; page 6, line 58 - page 7, lines 1-37 5; claims	1-37																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex																						
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier application or patent but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 15 January 1999		Date of mailing of the international search report 25 JAN 1999																				
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer  DR. ASHENAFI TESSEMA Telephone No.: (02) 6283 2271																				

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 98/01032

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 598552 A (SOLA INTERNATIONAL HOLDINGS LTD), 25 May 1994. Page 5, lines 42-44; page 5, line 58 - page 6, line 9; 1-37 claims	1-37
X	US 4511209 A (B.J. SKUTNIK), 16 April 1985. Col. 7, lines 3-13; claims 1, 7-11, 16-20	1-37
X	AU 54894/96 A (SOLA INTERNATIONAL HOLDINGS LTD), 31 October 1996. Page 13, lines 2-4; claims	1-4, 12-37
X	AU 44089/89 A (SHOWA DENKO KABUSHIKI KAISHA), 14 May 1990. Page 8, line 35 - page 12, line 36; claims	1-19
X	EP 217289 A (KANEKAFUCHI KAGAKU KOGYO KABUSHIKI), 8 April 1987. Page 5, line 24 - page 6, line 2; claims	1-19
X	EP 453149 A (PILKINGTON VISIONCARE INC.), 23 October 1991. Page 7, lines 30-32; claims	1-4, 21-37
X	US 4849462 A (T.E. BISHOP), 18 July 1989. Claims	1-4, 21-37
X	Derwent Abstract Accession No. 82-03105E, Class A89, and JP 56-151901 A (SUWA SEIKOSHA KK), 25 November 1981. Abstract	1-3, 20-23
X	Derwent Abstract Accession No. 89-036078, Class A26, and JP 63-309509 A (SHOWA DENKO KK), 16 December 1988. Abstract	1-3, 20-23
X	EP 530082 A (DAINIPPON INK AND CHEMICALS, INC.), 3 March 1993. Page 4, lines 19 - page 5, line 3.	1-3, 20-23
X	EP 541272 A (ROHM AND HAAS COMPANY), 12 May 1993 Page 4, lines 21-26	1-3
X	EP 177956 A (THE B.F. GOODRICH COMPANY), 16 April 1986. Page 4, line 2 - page 7, line 12	1-3
X	Patent Abstracts of Japan C-1126, page 38, JP 5-178929 A (MITSUBISHI HEAVY IND LTD ET AL), 20 July 1993 Abstract	1-3
X	Derwent Abstract Accession No. 82-03121J, Class A14, and JP 57-170912 A (NIPPON MECTRON KK), 21 October 1982. Abstract	1-3
X	Derwent Abstract Accession No. 79-85326B, Class A82, and JP 54-133600 A (JAPAN ATOMIC ENERGY RES), 17 October 1979. Abstract	1-3

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU 98/01032

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
WO	9744372	AU	27573/97				
AU	56807/96	WO	9638486	EP	828766	AU	7263/95
		CA	2221939	CN	1185789		
EP	598551	AU	50582/93	CA	2102379	JP	7026089
		MX	9307107				
EP	598552	AU	50581/93	CA	2102378	JP	7002939
US	4511209	CA	1221795				
AU	54894/96	WO	9634025	EP	822948	CA	2218678
AU	44089/89	EP	394495	JP	3054226	US	5183917
		WO	9004587	JP	3021638	JP	2160762
		JP	2113027	JP	2113005	US	5270439
EP	217289	AU	63135/86	JP	62074959	US	5447978
EP	453149	AU	75160/91	HK	1031/95	JP	4227617
		US	5373033				
US	4849462	CA	1236623	EP	149741	JP	60118759
		JP	6234554				
EP	530082	AU	21128/92	CA	2076356	US	5333234
		JP	5271350				
CONTINUED							

INTERNATIONAL SEARCH REPORT

Information on patent family members continued

International application No.

PCT/AU 98/01032

Patent Document Cited in Search Report				Patent Family Member			
EP	541272	AU	27028/92	BR	9204256	CA	2081583
		CN	1073451	FI	924969	HK	1606/96
		HU	64020	JP	5214008	MX	9206247
		NO	924146	US	5294728	ZA	9207902
		US	5399642	US	5492965	US	5498675
EP	177956	AU	48166/85	BR	8505037	CA	1251300
		CN	85107445	IN	164548	JP	61123613
		NO	853906	US	4918151	US	5112522
		US	5847062				
END OF ANNEX							

PUB-NO: WO009938924A1
DOCUMENT-IDENTIFIER: WO 9938924 A1
TITLE: COATING COMPOSITION
PUBN-DATE: August 5, 1999

INVENTOR-INFORMATION:

NAME	COUNTRY
CHEN, FANG	AU
TOH, HUAN KIAK	AU
FISHER, MARK CHRISTOPHER	AU
CUTHBERTSON, MATTHEW JOHN	AU

ASSIGNEE-INFORMATION:

NAME	COUNTRY
SOLA INT HOLDINGS	AU
CHEN FANG	AU
TOH HUAN KIAK	AU
FISHER MARK CHRISTOPHER	AU
CUTHBERTSON MATTHEW JOHN	AU

APPL-NO: AU09801032
APPL-DATE: December 14, 1998

PRIORITY-DATA: AU00PP155998A (January 29, 1998)

INT-CL (IPC) : C09D007/12 , C09D131/06 ,
C08K005/37 , G02B001/04 ,
C09D131/00 , C09D131/08 ,
C09D139/04 , C08F026/06 ,
C08F126/06 , C08F226/06 ,
C08F018/24 , C08F118/00 ,
C08F218/00 , C08F218/04 ,
C08F018/16 , C08F118/16 ,
C08F218/16 , C08F018/18 ,
C08F118/18 , C08F218/18 ,
C08F002/48 , C08J007/04

EUR-CL (EPC) : C08F246/00 , C09D004/00 ,
G02B001/10

ABSTRACT:

CHG DATE=19990902 STATUS=O>clcross-linkable
primer coating composition which is UV curable,
exhibits a very short cure time, and includes an
effective amount of a di-or polythiol compound.